

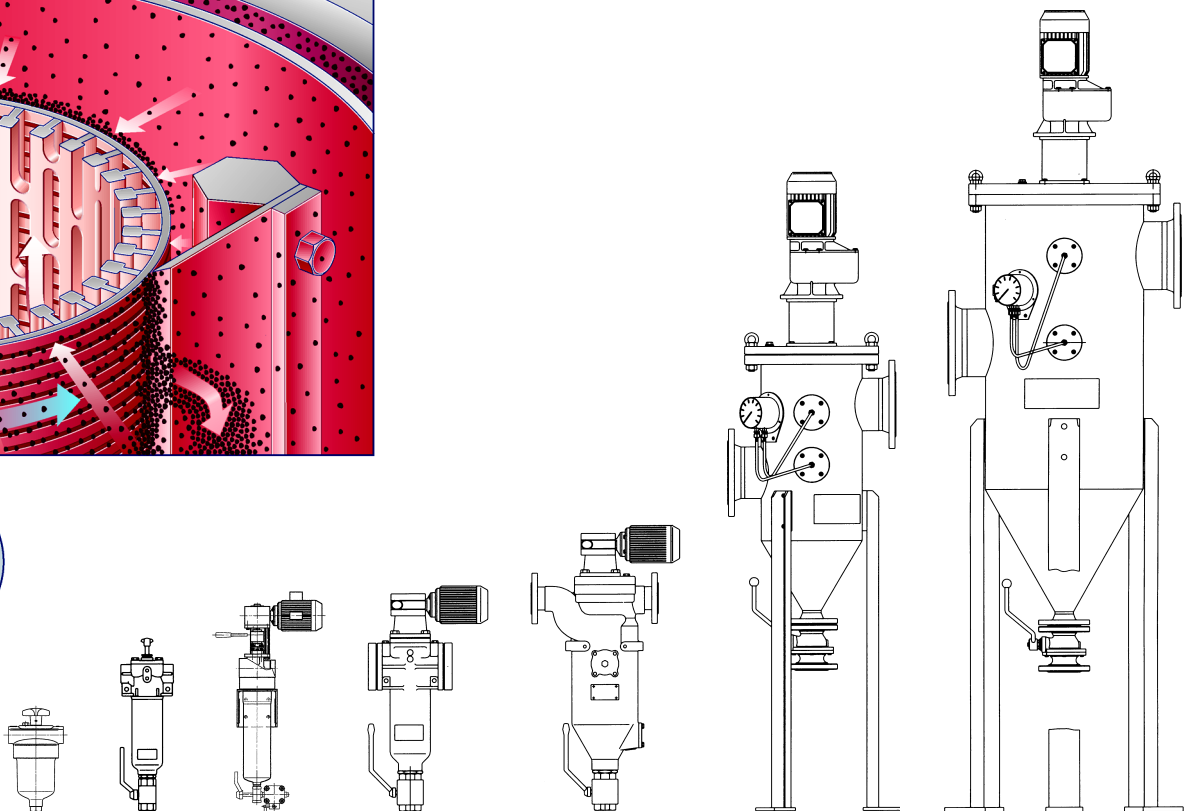




MAHLE[®]
Industriefilter

Automatic metal-edge filter

with radial scraper cleaning device,
optional with integrated cyclonic pre-separation

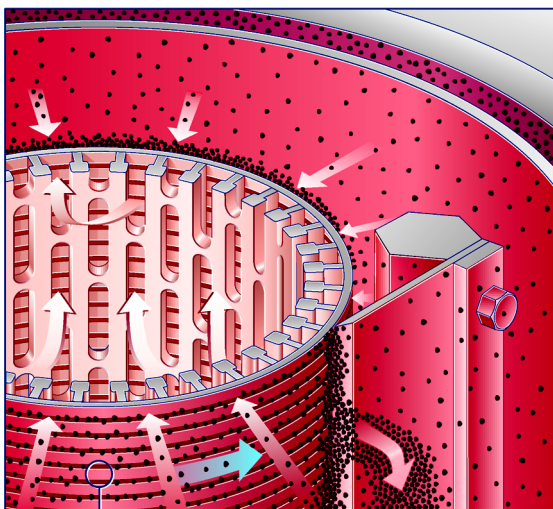

	AF 71 L/G/H/S	AF 72 G/S	AF 73/93 G/S	AF 74/94 S	AF 75/95 S AF 76/96 S
Connection size	G ½ G 1, G 1¼	G 1½ DN 40/50	G 2 DN 50/65/80	DN 100/125/150	DN 200/250/300
Operating pressure	40, 100 and 400 bar	16, 40 and 100 bar	16 and 63 bar	16 bar	16 bar
Cartridges	1xØ42x70 1xØ42x190	1xØ65x230	1xØ110x265	3x2xØ110x265 3x3xØ110x265 3x4xØ110x265	6/12x2xØ110x265 6/12x3xØ110x265 6/12x4xØ110x265
Height	239 362	595	755	1870–2680	2620–3160 2857–3397
Gap width	30, 40, 50, 60, 80, 100, 130, 160, 200, 250, 360, 500, 1000, 1500, 2000				




MAHLE[®]
Industriefilter

Automatic metal-edge filter with separate discharge

AF 8 ...

scraper cleaning device axial


Option: heating jacket
patented principle

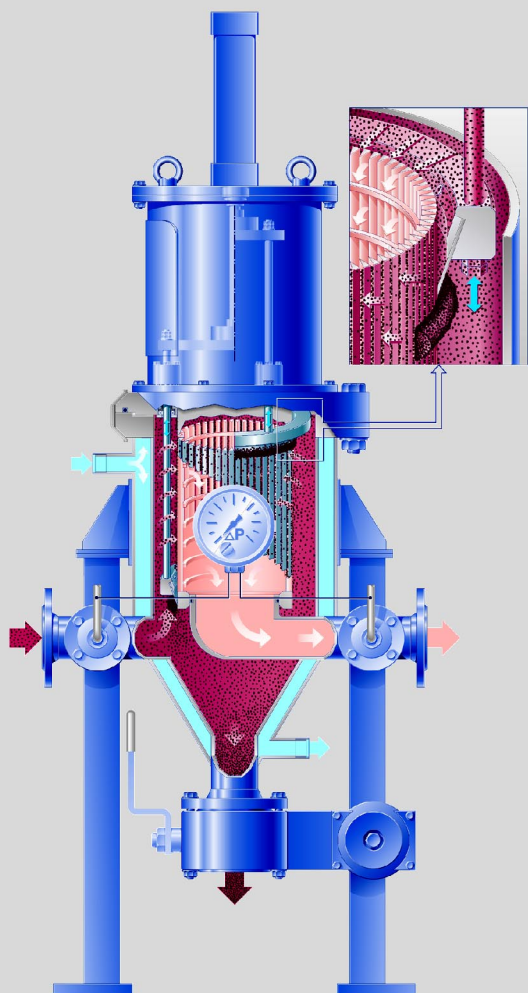

AF 4 ... / AF 5 ...

scraper cleaning device radial

Option: heating jacket, integrated cyclonic
pre-separation
patented principle

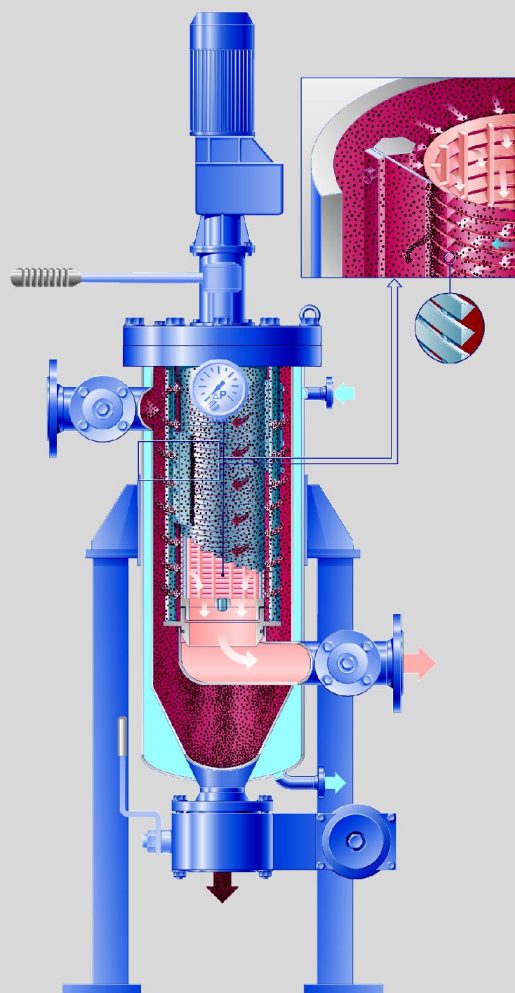

I.e. suitable for:

- food stuff, chocolate and dough
- paste and pu-components
- grease, adhesive aso.