


2-way ball valves with flange connection

Steel · SAE · DN 12 - DN 25

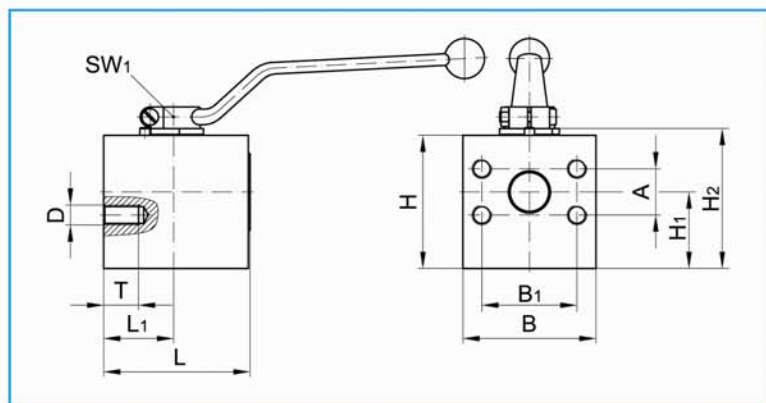

Type of connection

DN	Flange-size (inch)	D	T	A	B ₁	L	L ₁	B	H	H ₁	H ₂	SW ₁	Handle Code	Weight
----	-----------------------	---	---	---	----------------	---	----------------	---	---	----------------	----------------	-----------------	----------------	--------

ISO 6162-1

12	1/2	M8	17	17,5	38,1	60	23,5	55	45	22	48,5	10	3	1,1
20	3/4	M10	21	22,3	47,6	80	39,5	70	70	39	74,0	14	8	2,8
25	1	M10	19	26,2	52,4	88	42,0	80	80	46	84,0	14	8	4,0

ISO 6162-2

12	1/2	M8	19	18,2	40,5	60	23,5	55	45	22	48,5	10	3	1,1
20	3/4	M10	21	23,8	50,8	80	39,5	70	70	39	74,0	14	8	2,8
25	1	M12	23	27,8	57,2	88	42,0	80	80	46	84,0	14	8	4,0

12	1/2	5/16 - 18 UNC	21	18,2	40,5	60	23,5	55	45	22	48,5	10	3	1,1
20	3/4	3/8 - 16 UNC	24	23,8	50,8	80	39,5	70	70	39	74,0	14	8	2,8
25	1	7/16 - 14 UNC	27	27,8	57,2	88	42,0	80	80	46	84,0	14	8	4,0

Handle included in delivery

For handles refer to "Attachments, accessories".

Actuators and custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Body:	Steel	Steel
Ball:	Steel, hard chrome plated	Steel, hard chrome plated
Stem:	Steel	Steel
Ball seats:	POM	POM
Stem seals:	NBR	FKM

DN	PN	Article-No.	PN	Article-No.
12	350	104 021	350	104 041
20	350	104 022	350	104 042
25	315	104 023	315	104 043
12	350	104 061	350	104 081
20	350	104 062	350	104 082
25	315	104 063	315	104 083
12	400	104 027	400	104 047
20	400	104 028	400	104 048
25	400	104 029	400	104 049
12	400	104 067	400	104 087
20	400	104 068	400	104 088
25	400	104 069	400	104 089