
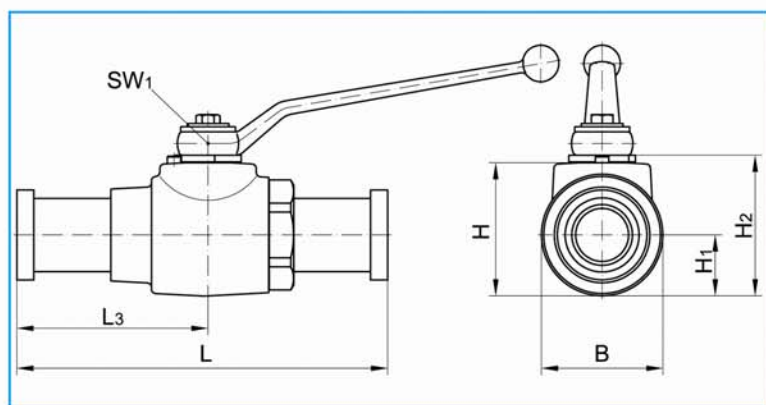



2-way ball valves with flange connection

Steel · SAE · DN 12 - DN 50 · for split flanges



*) block body

Type of connection	DN	Flange-size (inch)	D ₁	D ₂	L	L ₁	L ₂	L ₃	B	H	H ₁	H ₂	SW	SW ₁	Handle Code	Weight
 ISO 6162-1	12*	1/2	30,20	24,0	151,0	42,0	6,8	75,5	35	40	17,0	43,5	32	10	3	0,9
	20*	3/4	38,10	31,5	162,0	43,0	6,8	81,0	45	55	24,0	59,0	41	14	8	1,7
	25*	1	44,45	38,0	178,0	38,9	8,0	89,0	55	60	26,0	64,0	50	14	8	2,5
	32	1 1/4	50,80	43,0	190,5	40,3	8,0	99,0	73	80	36,5	84,5	60	17	22	3,8
	40	1 1/2	60,35	50,0	231,0	58,3	8,0	115,5	85	90	42,5	94,5	70	17	22	4,5
	50	2	71,40	62,0	232,0	50,9	9,6	116,0	99	104	49,5	108,5	85	17	22	6,1
 ISO 6162-2	12*	1/2	31,8	24	151	42,0	7,8	75,5	35	40	17,0	43,5	32	10	3	1,0
	20*	3/4	41,3	32	174	49,0	8,8	87,0	45	55	24,0	59,0	46	14	8	1,8
	25*	1	47,6	38	198	49,0	9,5	99,0	55	60	26,0	64,0	50	14	8	2,6
	32	1 1/4	54,0	44	223	56,5	10,3	115,0	73	80	36,5	84,5	60	17	22	4,0
	40	1 1/2	63,5	51	281	83,5	12,6	140,5	85	90	42,5	94,5	70	17	22	5,6
	50	2	79,4	67	316	93,5	12,6	158,5	99	104	49,5	108,5	85	17	22	7,7

Handle included in delivery

For actuators and handles refer to "Attachments, accessories".

Custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Body:	Steel	Steel
Ball:	Steel, hard chrome plated	Steel, hard chrome plated
Stem:	Steel	Steel
Ball seats:	POM	POM
Stem seals:	NBR	FKM

DN	O-Ring	PN	Article-No.	PN	Article-No.
12"	18,64 x 3,53	350	104 523	350	104 533
20"	24,99 x 3,53	350	104 524	350	104 534
25"	32,92 x 3,53	315	104 501	315	104 511
32	37,69 x 3,53	250	104 502	250	104 512
40	47,22 x 3,53	200	104 503	200	104 513
50	56,74 x 3,53	160	104 504	160	104 514
12"	18,64 x 3,53	400	104 528	400	104 538
20"	24,99 x 3,53	400	104 529	400	104 539
25"	32,92 x 3,53	400	104 505	400	104 515
32	37,69 x 3,53	400	104 506	400	104 516
40	47,22 x 3,53	400	104 507	400	104 517
50	56,74 x 3,53	400	104 508	400	104 518