


2-way ball valves with flange connection

Steel · SAE · DN 32 - DN 50

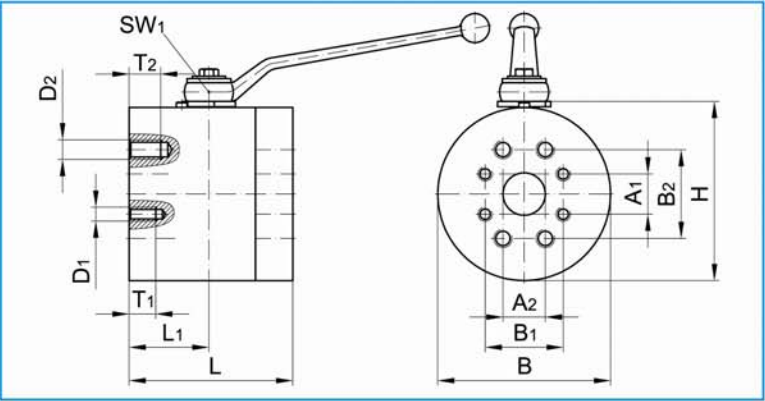

Type of connection	DN	Flange- D1 size (inch)	T1	A1	B1	D2	T2	A2	B2	L	L1	B	H	SW1	Handle Code	Weight
ISO 6162-1	32	1 1/4	M10	20	30,2	58,7	M12	24	31,8	66,6	123	60	130	134,5	17 22	11,8
	40	1 1/2	M12	25	35,7	69,9	M16	27	36,5	79,3	126	61	140	144,5	17 22	13,6
	50	2	M12	25	42,8	77,8	M20	35	44,5	96,8	158	79	160	162,5	17 22	20,9
ISO 6162-2	32	1 1/4	7/16 - 14 UNC	28	30,2	58,7	1/2 - 13 UNC	28	31,8	66,6	123	60	130	134,5	17 22	11,8
	40	1 1/2	1/2 - 13 UNC	27	35,7	69,9	5/8 - 11 UNC	28	36,5	79,3	126	61	140	144,5	17 22	13,6
	50	2	1/2 - 13 UNC	27	42,8	77,8	3/4 - 10 UNC	36	44,5	96,8	158	79	160	162,5	17 22	20,9

D1; A1; B1; T1; Δ ISO 6162-1

D2; A2; B2; T2; Δ ISO 6162-2

*) Please check pressure rating of the SAE flanges

Handle included in delivery

For handles refer to "Attachments, accessories".

Actuators and custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Body:	Steel	Steel
Ball:	Steel, hard chrome plated	Steel, hard chrome plated
Stem:	Steel	Steel
Ball seats:	POM	POM
Stem seals:	NBR	FKM

DN	PN	Article-No.	PN	Article-No.
32	400*	104 024	400*	104 044
40	400*	104 025	400*	104 045
50	400*	104 026	400*	104 046
32	400*	104 064	400*	104 084
40	400*	104 065	400*	104 085
50	400*	104 066	400*	104 086