
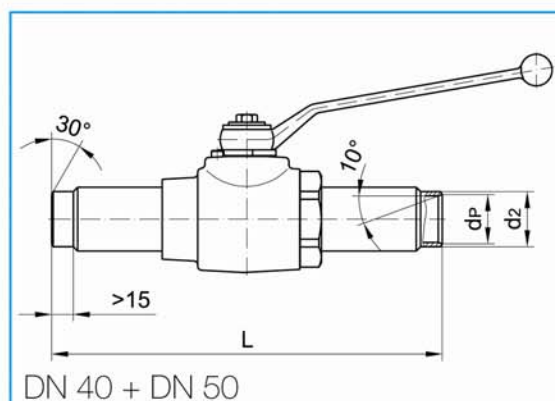


2-way ball valves with welding end

Steel · DN 10 - DN 50

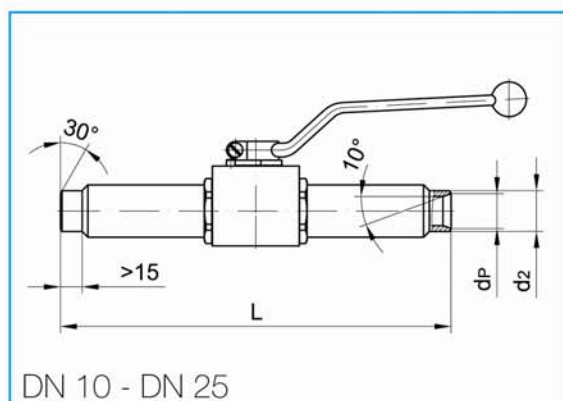

Type of connection	DN	d ₂	d _P	L	Weight
PN 40	10	18	13,0	270	1,00
	15	22	17,0	270	2,05
	20	28	22,0	270	2,75
	25	34	28,5	270	3,85
	40	49	43,0	270	6,50
	50	61	54,0	300	9,55
PN 63 PN 100	10	18	13,0	270	1,00
	15	22	17,0	270	2,05
	25	34	28,5	270	3,85
	40	49	43,0	270	6,50
	50	61	54,0	300	9,55
PN 160	10	18	13,0	270	1,00
	15	22	17,0	270	2,05
	25	34	27,0	270	3,85
	40	49	41,0	270	6,50
	50	61	52,5	300	9,55
PN 250	10	18	12,0	270	1,00
	15	22	16,0	270	2,05
	25	35	26,5	270	3,85
	40	49	38,5	270	6,50
	50	61	45,0	300	9,55
PN 320	10	18	12,0	270	1,00
	15	22	15,0	270	2,05
	25	35	24,0	270	3,85
	40	49	36,0	270	6,50
	50	77	59,5	300	9,55
PN 400	10	18	10,0	270	1,00
	15	28	17,0	270	2,05
	25	44	29,0	270	3,85
	40	61	40,0	270	6,50
	50	77	49,5	300	9,55

Welding ends : DIN EN 12627 (DIN 3239-1)

Overall length : DIN EN 12982 basic range 68 (DIN 3202-2-S10)

For dimensions of the ball valves refer to respective chapter "2-way ball valves".

Custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Body:	Steel	Steel	Steel
Ball:	Steel, hard chrome plated	Steel, hard chrome plated	Steel, hard chrome plated
Stem:	Steel	Steel	Steel
Ball seats:	POM	POM	PTFE
Stem seals:	NBR	FKM	FKM

DN	Article-No.	Article-No.	Article-No.
10	109 300	109 306	109 312
15	109 301	109 307	109 313
20	109 302	109 308	109 314
25	109 303	109 309	109 315
40	109 304	109 310	109 316
50	109 305	109 311	109 317
10	109 300	109 306	109 312
15	109 301	109 307	109 313
25	109 303	109 309	109 315
40	109 304	109 310	109 316
50	109 305	109 311	109 317
10	109 300	109 306	109 312
15	109 301	109 307	109 313
25	109 318	109 321	109 324
40	109 319	109 322	-
50	109 320	109 323	-
10	109 325	109 330	109 335
15	109 326	109 331	109 336
25	109 327	109 332	109 337
40	109 328	109 333	-
50	109 329	109 334	-
10	109 325	109 330	109 335
15	109 338	109 342	109 346
25	109 339	109 343	-
40	109 340	109 344	-
50	109 341	109 345	-
10	109 347	109 352	-
15	109 348	109 353	-
25	109 349	109 354	-
40	109 350	109 355	-
50	109 351	109 356	-