


2-way ball valves with welding end

Stainless Steel · with removable centre · DN 10 - DN 50

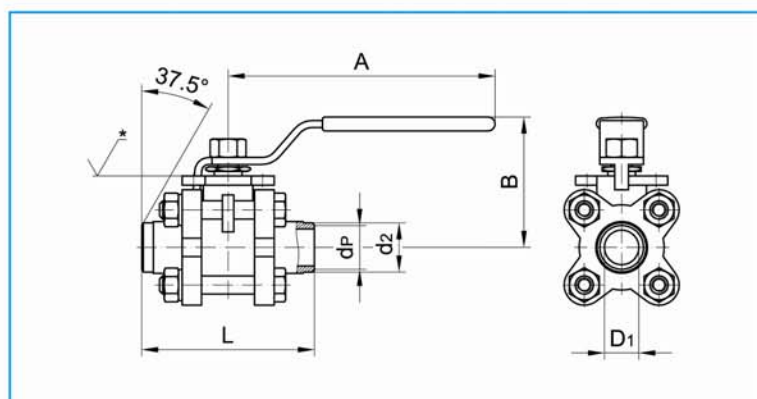

Type of connection	DN	D1	d2	dp	L	A	B	* Porting pattern DIN EN ISO 5211	Weight
PN 40	50	49,0	60,3	56,5	150	191	104	F05	3,60
PN 63	10	12,7	17,2	15,0	70	105	51	F04	0,45
	15	15,0	21,3	19,0	75	105	61	F04	0,60
	20	20,0	26,9	23,0	90	125	66	F04	0,65
	25	25,0	33,7	30,0	100	152	78	F04	1,20
	32	32,0	42,4	39,0	110	152	82	F04	1,75
	40	38,0	48,3	45,0	125	191	95	F05	2,45

Handle included in delivery

Welding ends: DIN EN 12627 (DIN 3239-1)

Overall length: DIN EN 12982 basic range 67 (DIN 3202-2-S13)

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Body:	Stainless steel
Ball:	Stainless steel
Stem:	Stainless steel
Ball seats:	PTFE
Stem seals:	PTFE

DN

Article-No.

50 109 363

10 109 357

15 109 358

20 109 359

25 109 360

32 109 361

40 109 362