


2-way ball valves with staple lock connector

Steel · DN 10 - DN 25

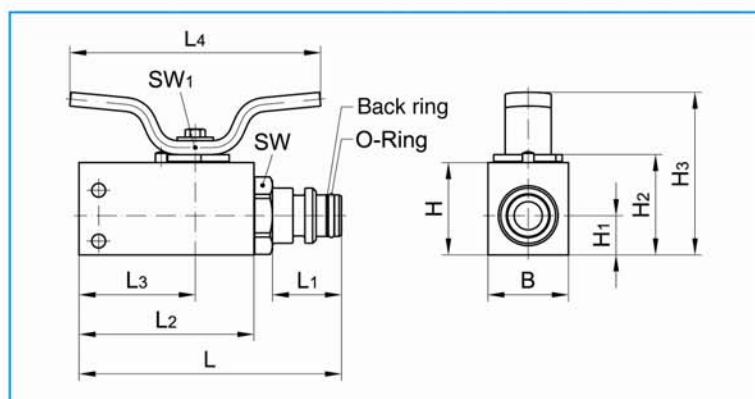

Type of connection	DN	L	L ₁	L ₂	L ₃	L ₄	B	H	H ₁	H ₂	H ₃	SW	SW ₁	Weight
Staple lock female/ male connector DIN 20043	10	106	29	70	47,0	109	30	35	14,5	38,5	65,5	24	8	0,60
	12	114	29	76	50,5	109	35	40	17,0	43,5	70,5	30	10	0,84
	20	120	29	82	52,0	160	45	55	24,0	59,0	99,0	41	14	1,65
	25	143	35	100	65,0	160	55	60	26,0	64,0	104,0	50	14	2,50

Handle, o-ring and back ring included in delivery

For handle refer to "Attachments, accessories".

Actuators and custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Body:	Steel
Ball:	Steel, Steel, hard chrome plated
Stem:	Steel
Ball seats:	POM
Stem seals:	NBR

DN	O-Ring	PN	Article-No.
10	10 x 2,0	500	103 001
12	13 x 2,5	500	103 002
20	19 x 2,5	400	103 003
25	25 x 2,5	400	103 004