


Multi-way ball valves with floating ball

3-way · Steel · SAE-flange connection · DN 20 - DN 32

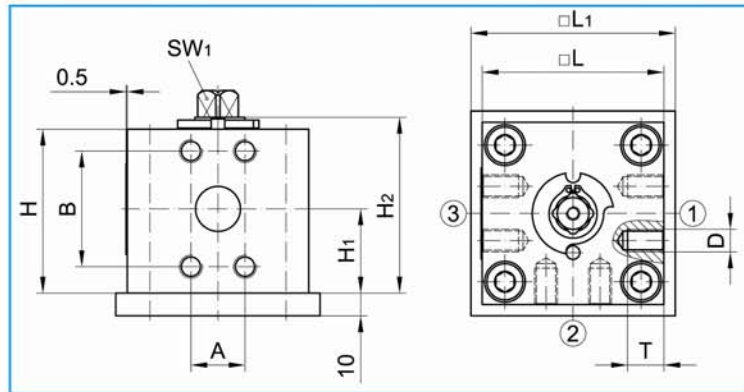

Type of connection	DN	Flange-size (inch)	D	T	A	B	L	L1	H	H1	H2	SW1	Weight
ISO 6162-2	20	3/4	M10	21	23,8	50,8	80	90	72	37	77,5	14	4,0
	25	1	M12	23	27,8	57,2	90	100	80	40	85,5	14	5,5
	32	1 1/4	M12	24	31,8	66,6	100	110	100	50	106,0	17	8,0
	20	3/4	3/8 - 16 UNC	24	23,8	50,8	80	90	72	37	77,5	14	4,0
	25	1	7/16 - 14 UNC	27	27,8	57,2	90	100	80	40	85,5	14	5,5
	32	1 1/4	1/2 - 13 UNC	28	31,8	66,7	100	110	100	50	106,0	17	8,0

Handle on request, refer to "Attachments, accessories".

✱ Application of pressure only as indicated in chapter "technical information"



Actuators and custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar



Bore:	L	L	T	T
Cycling:	90°	90°	90°	90°
Body:	Steel	Steel	Steel	Stahl
Ball:	Steel, hard chrome plated	Steel, hard chrome plated	Steel, hard chrome plated	Steel, hard chrome plated
Stem:	Steel	Steel	Steel	Steel
Ball seats:	POM	POM	POM	POM
Stem seals:	NBR	FKM	NBR	FKM

DN	PN	Article-No.	PN	Article-No.	PN	Article-No.	PN	Article-No.
20	400	204 301	400	204 306	400	204 311	400	204 316
25	400	204 302	400	204 307	400	204 312	400	204 317
32	400	204 303	400	204 308	400	204 313	400	204 318
20	400	204 321	400	204 326	400	204 331	400	204 336
25	400	204 322	400	204 327	400	204 332	400	204 337
32	400	204 323	400	204 328	400	204 333	400	204 338