
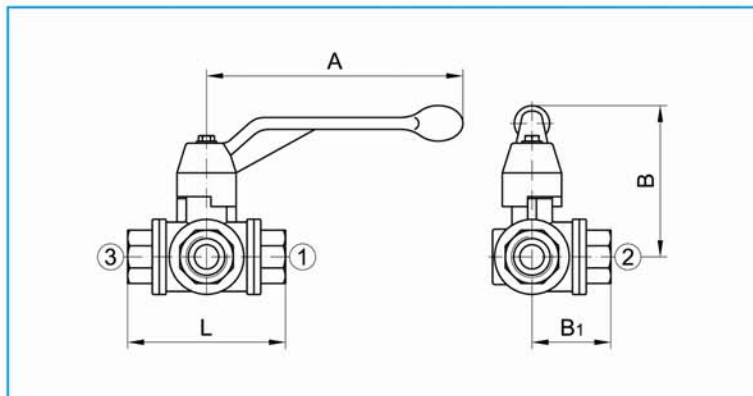


Multi-way ball valves with floating ball

3-way · Brass · Threaded connector · DN 6 - DN 50



Type of connection	DN/LW	Thread D	L	L ₁	A	B	B ₁	Weight
 BSP-female thread DIN EN 10226-1	6/10	Rp 1/4	71	13	130	77	35,5	0,7
	10/13	Rp 3/8	71	13	130	77	35,5	0,7
	15/13	Rp 1/2	80	13	130	77	40,0	0,7
	20/18	Rp 3/4	96	15	160	89	48,0	1,1
	25/23	Rp 1	113	17	160	93	56,5	1,7
	32/29	Rp 1 1/4	130	19	195	110	65,0	2,6
	40/35	Rp 1 1/2	147	22	195	115	73,5	3,7
	50/44	Rp 2	169	27	235	129	84,5	5,8

Handle included in delivery

✱ Application of pressure only as indicated in chapter "technical information"



Actuators and custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar



Bore:	L	T
Cycling:	90°	90°
Body:	Brass	Brass
Ball:	Brass, hard chrome plated	Brass, hard chrome plated
Stem:	Brass	Brass
Ball seats:	PTFE	PTFE
Stem seals:	PTFE	PTFE

DN/LW

PN

Article-No.

PN

Article-No.

6/11

35

201 501

35

201 551

10/11

35

201 502

35

201 552

15/13

40

201 503

40

201 553

20/18

40

201 504

40

201 554

25/23

25

201 505

25

201 555

32/29

16

201 506

16

201 556

40/35

16

201 507

16

201 557

50/44

16

201 508

16

201 558