



3-way · Steel · manifold mounting · DN 6 - DN 50

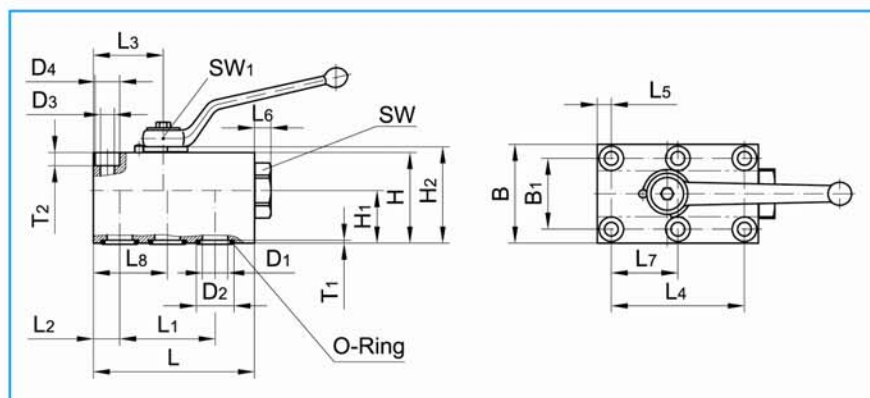

Anschluß-Art	DN	L	L ₁	L ₂	L ₃	L ₄	L ₅	L ₆	L ₇	L ₈	B	B ₁	H	H ₁	H ₂	T ₁	T ₂
Body-Flange with O-ring-seal	6	59	35	8,5	23,5	35	8,5	4,5	17,5	26,0	40	27	35	20,0	37,5	1,8	6,8
	10	73	44	10,0	29,0	55	7,5	7,0	27,5	29,0	55	40	45	24,5	48,5	1,8	8,0
	12	98	58	16,0	42,5	83	7,5	10,0	41,5	42,5	60	45	55	32,0	58,5	1,8	8,0
	20	117	69	20,0	52,0	97	10,0	12,0	48,5	52,0	70	51	70	39,0	74,0	2,7	11,0
	25	138	81	24,0	62,0	115	10,0	7,0	57,5	62,0	80	60	80	46,0	84,0	2,7	11,0
	32	165	96	29,0	75,0	136	12,0	11,0	68,0	75,0	100	78	100	56,6	104,5	2,7	12,0
	40	175	112	28,5	84,5	112	28,5	25,0	56,0	84,5	130	95	100	52,6	104,5	2,7	17,5
	50	215	136	38,0	106,0	136	38,0	25,0	68,0	106,0	150	112	110	55,1	114,5	2,7	20,0

	DN	D1	E1	E2	E3	E4	E5	E6	E7	E8	E9	M	O-Ring
General tolerances	6	6,0	35	35,0	50,5	0,0	8,5	13,5	20,0	17,5	17,5	M 6	7,50 x 2,5
DIN ISO 2768	10	9,5	44	52,5	63,0	2,5	10,0	20,0	27,5	25,0	19,0	M 8	10,5 x 2,5
Surfaces	12	15,5	58	74,5	82,0	8,5	16,0	22,5	30,0	33,0	26,5	M 8	20,5 x 2,5
DIN EN ISO 4287	20	20,0	69	87,0	97,0	10,0	20,0	25,5	35,0	38,5	32,0	M10	23,5 x 3,5
	25	24,0	81	101,0	114,0	14,0	24,0	30,0	40,0	43,5	38,0	M10	28,5 x 3,5
	32	32,0	96	119,0	136,0	17,0	29,0	39,0	50,0	51,0	46,0	M12	33,5 x 3,5
	40	38,0	112	112,0	146,5	0,0	28,5	47,5	65,0	56,0	56,0	M16	42,0 x 3,5
	50	48,0	136	136,0	177,0	0,0	38,0	56,0	75,0	68,0	68,0	M20	49,0 x 3,5

Drilling pattern

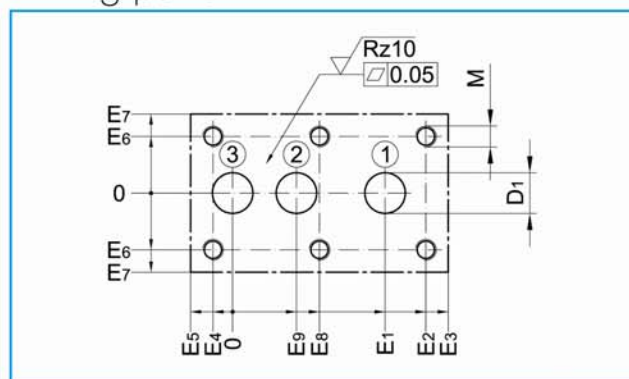

Handle included in delivery

For handles refer to "Attachments, accessories".

✱ Application of pressure only as indicated in chapter "technical information"


Actuators and custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

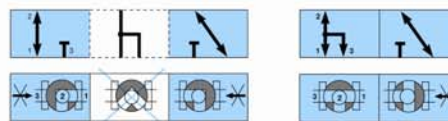

Bore:	L	T
Cycling:	90°	90°
Body:	Steel	Steel
Ball:	Steel, hard chrome plated	Steel, hard chrome plated
Stem:	Steel	Steel
Body seals:	NBR	NBR
Ball seats:	POM	POM
Stem seals:	NBR	NBR

DN	D1	D2	D3	D4	SW	SW1	Handle Code	Weight	for Cylinder-head screws DIN EN ISO 4762 (DIN 912)	PN	Article-No.	PN	Article-No.
6	6,0	12,0	6,4	11	24	7	1	0,58	M6 - 10,9	500	206 101	500	206 121
10	9,5	15,0	8,4	-	32	8	2	1,15	M8 - 10,9	500	206 102	500	206 122
12	15,5	25,0	8,4	-	36	10	3	2,11	M8 - 12,9	315	206 103	315	206 123
20	20,0	30,0	10,5	17	-	14	8	4,00	M10 - 12,9	250	206 104	250	206 124
25	24,0	35,0	10,5	17	50	14	8	5,58	M10 - 12,9	250	206 105	250	206 125
32	32,0	40,0	13,0	19	70	17	22	11,14	M12 - 12,9	250	206 106	250	206 126
40	38,0	48,5	17,0	26	-	17	22	15,19	M16 - 12,9	250	206 107	250	206 127
50	48,0	55,5	21,0	33	-	17	22	22,67	M20 - 12,9	315	206 108	315	206 128