


Multi-way ball valves with trunnion ball

Steel or Stainless steel · as combination

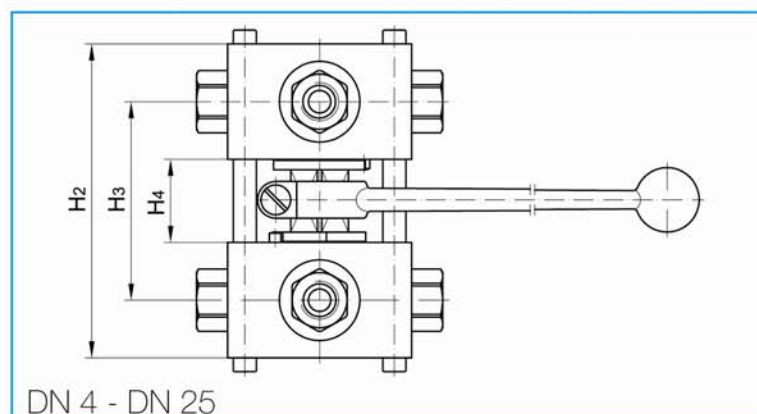

Handle included in delivery

For dimensions and article-numbers for ball valve bodies refer to the respective chapter.

Custom orders on request

All dimensions subject to change without notice



Dimensions in mm

Also available completely assembled

Type of connection	DN	H2	H3	H4	Handle Code	Mounting-sets	
						Article-No. (Steel)	Article-No. (Stainless steel)
ALL	4	114	74	34	44	203 890	203 950
	6	114	74	34	44	203 890	203 950
	8	136	86	36	45	203 891	203 951
	10	136	86	36	45	203 891	203 951
	12	146	91	36	45	203 892	203 952
	16/12	146	91	36	45	203 892	203 952
	20	195	115	45	47	203 893	203 953
	25	207	120	45	47	203 894	203 954


Combination consisting of:

two multi-way ball valves (without handle) and one mounting set

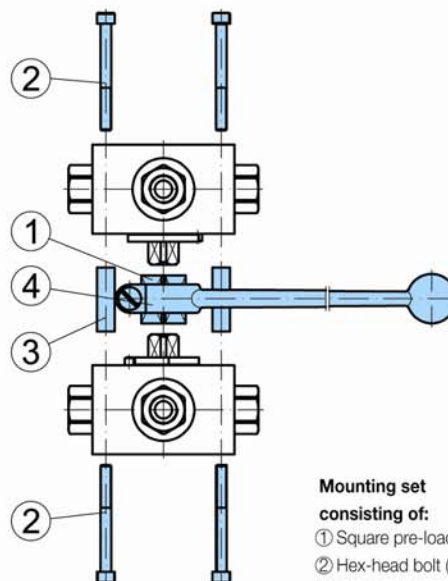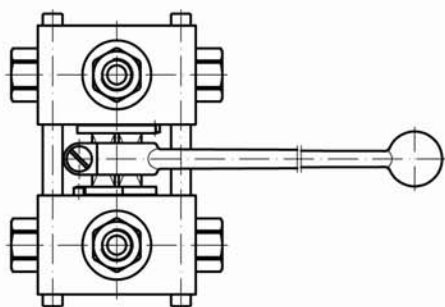

**Mounting set
consisting of:**

- ① Square pre-load coupling
- ② Hex-head bolt (6 pc.)
- ③ Spacer sleeves (3 pc.)
- ④ Handle

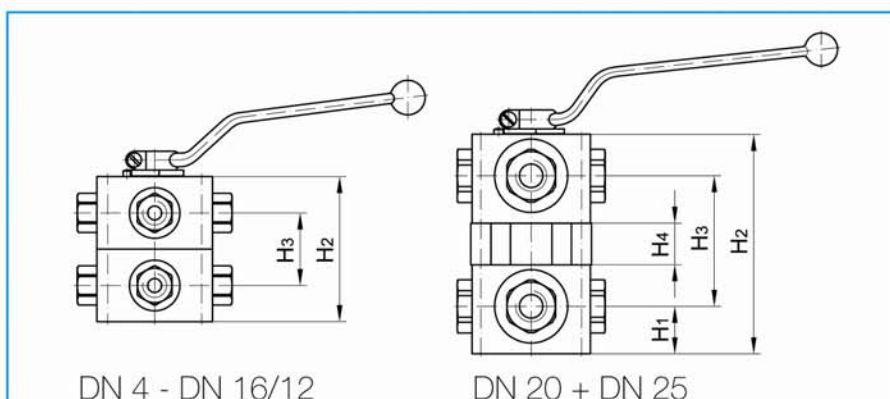

Handle included in delivery

For dimensions and article-numbers for ball valve bodies refer to the respective chapter.

Also available with most other connection types

Custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Type of connection	DN	Thread D	H ₁	H ₂	H ₃	H ₄	Handle Code
For cut (clamp) ring tube fittings DIN 2353 light series ISO 8434-1	4	M12 x 1,5	-	80	40	-	7
	6	M14 x 1,5	-	80	40	-	7
	8	M16 x 1,5	-	100	50	-	8
	10	M18 x 1,5	-	100	50	-	8
	12	M22 x 1,5	-	110	55	-	8
	16/12	M26 x 1,5	-	110	55	-	8
	20	M30 x 2	40,0	185	110	35	10
For cut (clamp) ring tube fittings DIN 2353 heavy series ISO 8434-1	25	M36 x 2	43,5	197	116	35	10
	4	M16 x 1,5	-	80	40	-	7
	6	M18 x 1,5	-	80	40	-	7
	8	M20 x 1,5	-	100	50	-	8
	10	M22 x 1,5	-	100	50	-	8
	12	M24 x 1,5	-	110	55	-	8
	16/12	M30 x 2	-	110	55	-	8
BSP-female thread DIN EN ISO 228-1	20	M36 x 2	40,0	185	110	35	10
	25	M42 x 2	43,5	197	116	35	10
	4	G 1/8	-	80	40	-	7
	6	G 1/4	-	80	40	-	7
	10	G 3/8	-	100	50	-	8
	12	G 1/2	-	110	55	-	8
	16/12	G 5/8	-	110	55	-	8
NPT-female thread ANSI/ASME B1.20.1-1983	20	G 3/4	40,0	185	110	35	10
	25	G1	43,5	197	116	35	10
	4	1/8 - 27 NPT	-	80	40	-	7
	6	1/4 - 18 NPT	-	80	40	-	7
	10	3/8 - 18 NPT	-	100	50	-	8
	12	1/2 - 14 NPT	-	110	55	-	8
	20	3/4 - 14 NPT	40,0	185	110	35	10
	25	1 - 11 1/2 NPT	43,5	197	116	35	10