
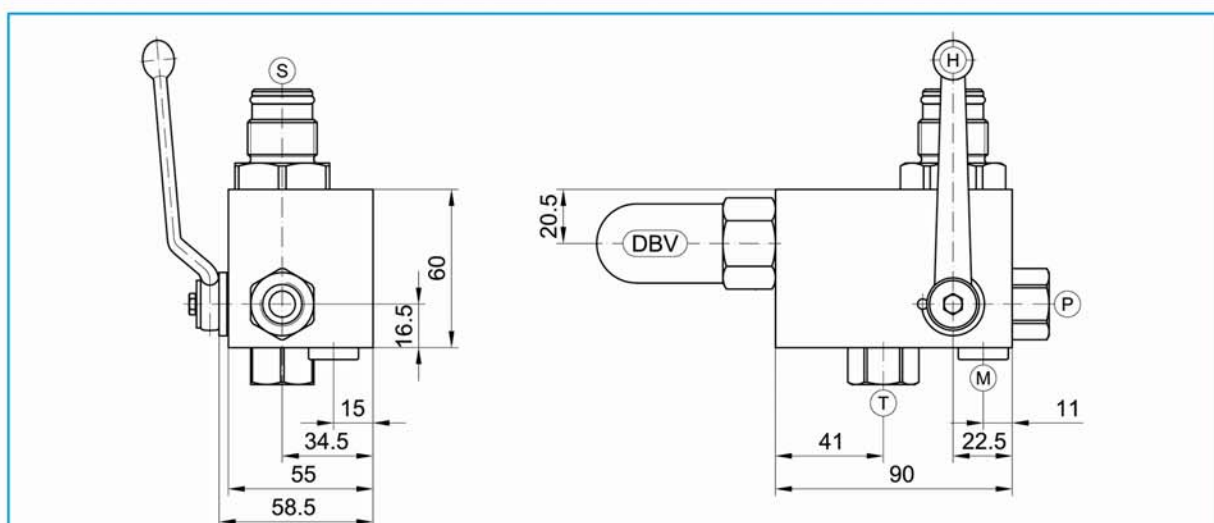


# Accumulator safety blocks · with integrated 3-way ball valve type RSK

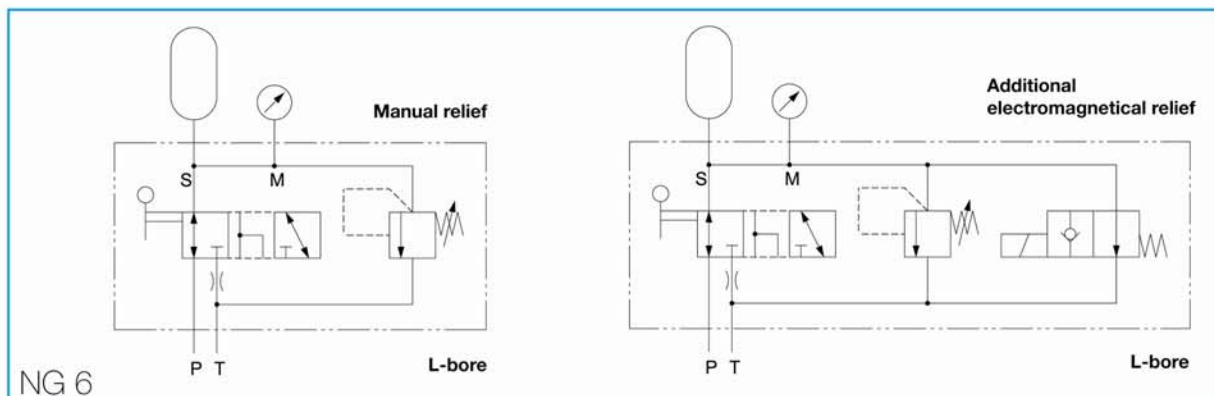

All dimensions subject to change without notice

- P = Pump connector**  
M-version 500 bar  
E-version 350 bar
- T = Tank connector**
- S = Accumulator connector**
- M = Pressure gauge connector (closed)**  
G 1/4 (DIN EN ISO 228-1)
- DBV = Pressure relief valve**  
cavity-thread M28x1.5  
assembly torque 50+5 Nm
- SV = 2-way Solenoid**  
Manifold mounting  
Drilling pattern ISO 4401-03-02-0-94  
(DIN 24340-A6)
- Handle Code 2 (8kt17)**  
refer to chapter "attachments, accessories"

## Adapter fittings for accumulator connector S




Fig. 1






Fig. 2

| Fig. | D1 Connection-thread | Adapter-fitting | K (SW) | L  | L <sub>1</sub> | D <sub>2</sub> | O-ring |
|------|----------------------|-----------------|--------|----|----------------|----------------|--------|
| 1    | G 3/4 A              | S 500           | 36     | 38 | 28             | -              | 17 x 3 |
|      | G 1 A                | S 501           | 41     | 44 | 34             | -              | 22 x 3 |
|      | G 1 1/4 A            | S 502           | 46     | 47 | 37             | -              | 30 x 3 |
|      | G 2 A                | S 503           | 65     | 54 | 44             | -              | 48 x 3 |
| 2    | M 30 x 1,5           | S 550           | 41     | 25 | 15             | 40             | 32 x 2 |
|      | M 40 x 1,5           | S 551           | 55     | 30 | 20             | 54             | 43 x 3 |
|      | M 50 x 1,5           | S 552           | 65     | 30 | 20             | 64             | 53 x 3 |

Also available with most other connection types

# Ball valve-combinations

Accumulator safety blocks · with integrated 3-way ball valve type RSK

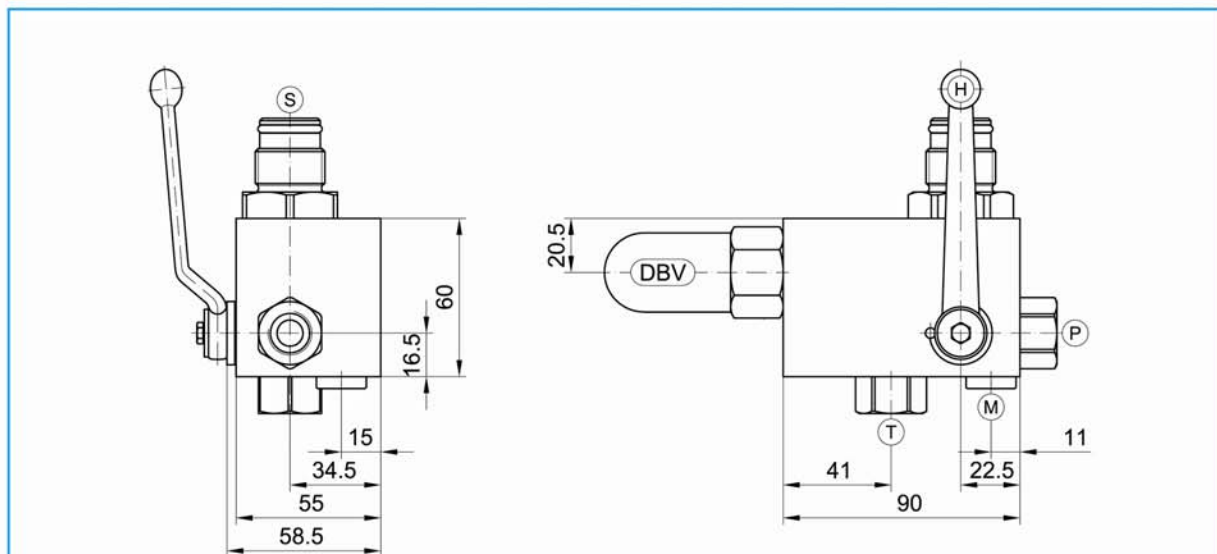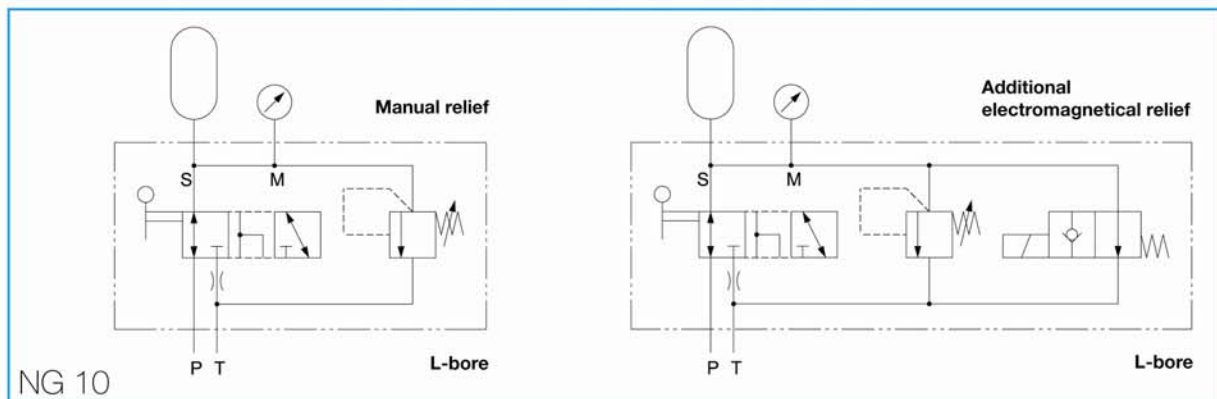

All dimensions subject to change without notice

- P = Pump connector**  
M-version 500 bar  
E-version 350 bar
- T = Tank connector**
- S = Accumulator connector**
- M = Pressure gauge connector (closed)**  
G 1/4 (DIN EN ISO 228-1)
- DBV = Pressure relief valve**  
cavity-thread M35x1.5  
assembly torque 80<sup>+5</sup> Nm
- SV = 2-way Solenoid**  
Manifold mounting  
Drilling pattern ISO 4401-03-02-0-94  
(DIN 24340-A6)
- Handle Code 2 (8kt8)**  
refer to chapter "attachments, accessories"

## Adapter fittings for accumulator connector S



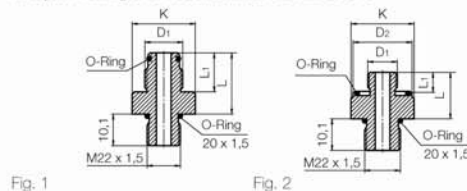


Fig. 1


Fig. 2

| Fig. | D1 Connection-thread | Adapter-fitting | K (SW) | L  | L1 | D2 | O-ring |
|------|----------------------|-----------------|--------|----|----|----|--------|
| 1    | G 3/4 A              | S 500           | 36     | 38 | 28 | -  | 17 x 3 |
|      | G 1 A                | S 501           | 41     | 44 | 34 | -  | 22 x 3 |
|      | G 1 1/4 A            | S 502           | 46     | 47 | 37 | -  | 30 x 3 |
|      | G 2 A                | S 503           | 65     | 54 | 44 | -  | 48 x 3 |
| 2    | M 30 x 1,5           | S 550           | 41     | 25 | 15 | 40 | 32 x 2 |
|      | M 40 x 1,5           | S 551           | 55     | 30 | 20 | 54 | 43 x 3 |
|      | M 50 x 1,5           | S 552           | 65     | 30 | 20 | 64 | 53 x 3 |

Also available with most other connection types

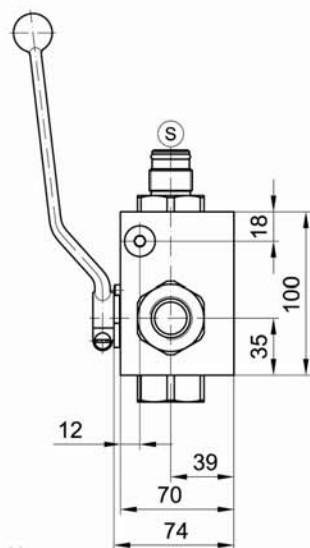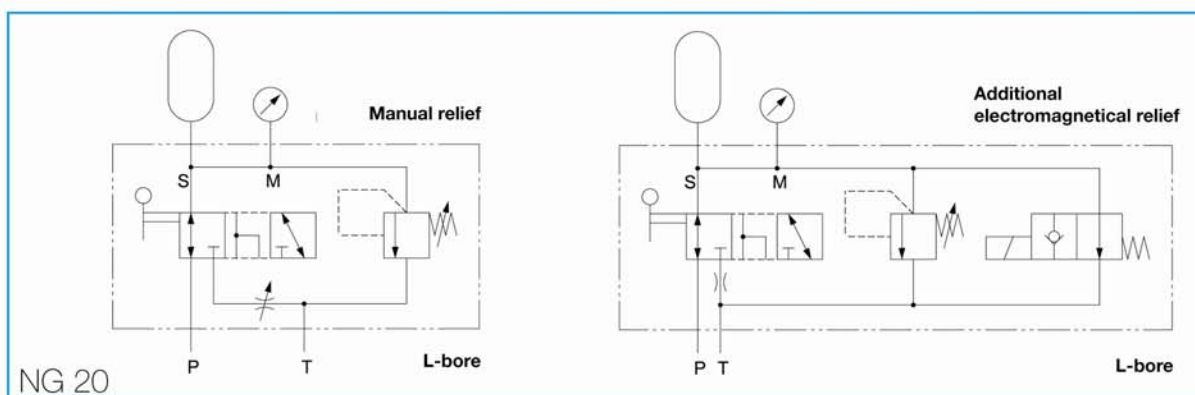

All dimensions subject to change without notice

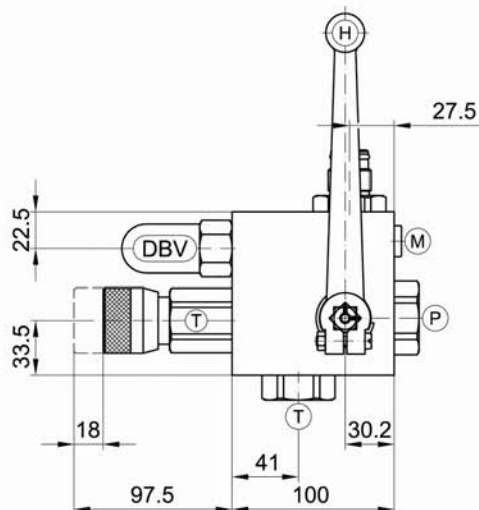

### Adapter fittings for accumulator connector S




Fig. 1




Fig. 2

| Fig. | D1 Connection-thread | Adapter-fitting | K (SW) | L  | L <sub>1</sub> | D <sub>2</sub> | O-ring |
|------|----------------------|-----------------|--------|----|----------------|----------------|--------|
| 1    | G 3/4 A              | S 600           | 41     | 38 | 28             | -              | 17 x 3 |
|      | G 1 A                | S 601           | 41     | 44 | 34             | -              | 22 x 3 |
|      | G 1 1/4 A            | S 602           | 46     | 47 | 37             | -              | 30 x 3 |
|      | G 2 A                | S 603           | 65     | 54 | 44             | -              | 48 x 3 |
| 2    | M 30 x 1,5           | S 650           | 41     | 25 | 15             | 40             | 32 x 2 |
|      | M 40 x 1,5           | S 651           | 55     | 30 | 20             | 54             | 43 x 3 |
|      | M 50 x 1,5           | S 652           | 65     | 30 | 20             | 64             | 53 x 3 |

Also available with most other connection types