



Accumulator safety blocks · with integrated 3-way ball valve type RSM

NG 10

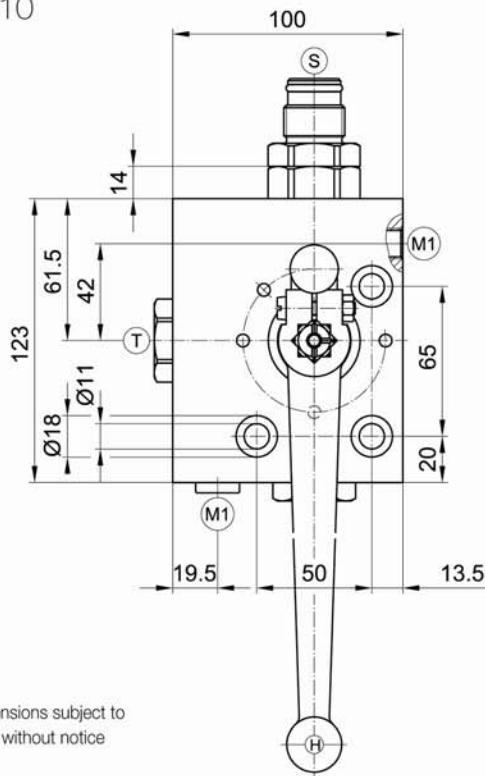

All dimensions subject to change without notice

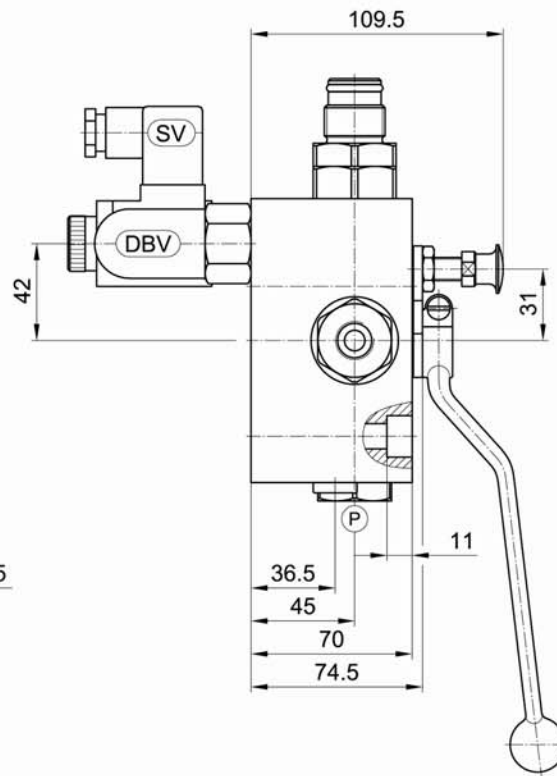

- P** = Pump connector
M-Version 400 bar
E-Version 350 bar
- T** = Tank connector
- S** = Accumulator connector
- M1** = Test gauge connection
G 1/4 (DIN EN ISO 228-1)
- M2** = Pressure gauge connector (closed)
G 1/4 (DIN EN ISO 228-1)
- DBV** = Pressure relief valve
cavity-thread M28x1.5
assembly torque 80⁺⁵ Nm/50⁺⁵ Nm
- SV** = 2-way Solenoid
cavity-thread M20x1.5
assembly torque 25⁺⁵ Nm
- Handle Code 2** (8kt14)
refer to chapter "attachments, accessories"

Adapter fittings for accumulator connector S




Fig. 1




Fig. 2

Fig.	D1 Connection-thread	Adapter-fitting	K (SW)	L	L ₁	D ₂	O-ring
1	G 3/4 A	S 500	36	38	28	-	17 x 3
	G 1 A	S 501	41	44	34	-	22 x 3
	G 1 1/4 A	S 502	46	47	37	-	30 x 3
	G 2 A	S 503	65	54	44	-	48 x 3
2	M 30 x 1,5	S 550	41	25	15	40	32 x 2
	M 40 x 1,5	S 551	55	30	20	54	43 x 3
	M 50 x 1,5	S 552	65	30	20	64	53 x 3

Also available with most other connection types