




Multi-way ball-valves with floating ball for pressure gauges (TK4)

Stainless steel • DN 10

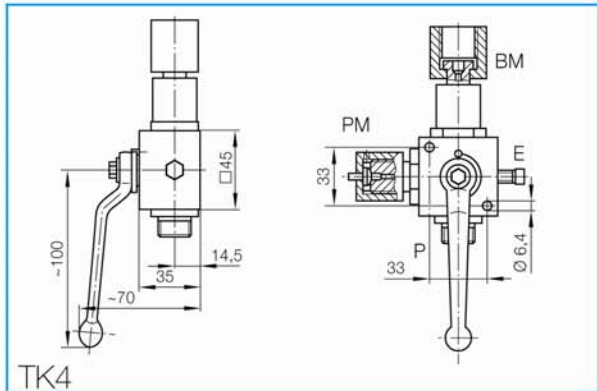

Custom orders on request
All dimensions subject
to change without notice
Dimensions in mm
Weight in kg
Pressure in bar

P = Pressure inlet port
E = Bleeder screw
PM = Test gauge port
BM = System gauge port

Body:	Stainless steel
Ball:	Stainless steel
Stem:	Stainless steel
Ball seats:	PTFE
Stem seals:	FKM


Connections

BM	PM	P
G 1/2	G 1/2	M 18 x 1,5
G 1/2	M 20 x 1,5	M 18 x 1,5
G 1/2	G 1/2	G 1/2
G 1/2	M 20 x 1,5	G 1/2

PN	Article-No.
100	101 072
100	101 074
100	101 076
100	101 078


Type of connection

P
For cut (clamp)
ring tube
fittings
DIN 2353
light series
ISO 8434-1




Thread D	RA	L ₁	L ₂	SW
M 18 x 1,5	12	11	15	24

P or PM
BSP-female thread
DIN EN ISO 228-1




G 1/2	-	15	21	27
-------	---	----	----	----

PM
Thread connec-
tion nipple with
coupling sleeve
meeting,
DIN 16287-C



M 20 x 1,5	-	22	35	24
------------	---	----	----	----

BM
Adapter with
DIN 16284
swivel nut
connector
nipple and
spindle, for
pressure gauge
mounting bracket
as per 16271-B



G 1/2	-	19	66	27
-------	---	----	----	----