
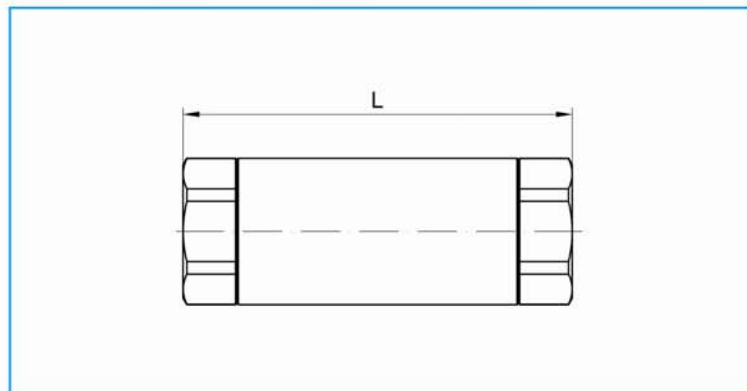





Valves

Check valves with threaded connector · Steel · DN 4 - DN 50



Full flow, no reduction!

Type of connection	DN	Thread D	RA	L	L ₁	SW	opening-pressure	Weight
For cut (clamp) ring tube fittings DIN 2353 light series ISO 8434-1 	4	M12 x 1,5	6	88,0	10	19	1,0	0,18
	6	M14 x 1,5	8	88,0	10	19	1,0	0,18
	8	M16 x 1,5	10	85,0	11	24	0,5	0,27
	10	M18 x 1,5	12	87,0	11	24	0,5	0,27
	12	M22 x 1,5	15	105,0	12	30	0,5	0,46
	16	M26 x 1,5	18	100,0	12	36	0,5	0,78
	20	M30 x 2	22	126,0	14	41	0,5	1,00
	25	M36 x 2	28	137,0	14	50	0,5	1,75
	32	M45 x 2	35	174,5	16	60	0,5	3,00
	40	M52 x 2	42	on request				
For cut (clamp) ring tube fittings DIN 2353 heavy series ISO 8434-1 	4	M16 x 1,5	8	94,0	12	19	1,0	0,18
	6	M18 x 1,5	10	94,0	12	19	1,0	0,18
	8	M20 x 1,5	12	87,0	12	24	0,5	0,27
	10	M22 x 1,5	14	93,0	14	24	0,5	0,27
	12	M24 x 1,5	16	109,0	14	30	0,5	0,46
	16	M30 x 2	20	108,0	16	36	0,5	0,83
	20	M36 x 2	25	134,0	18	41	0,5	1,00
	25	M42 x 2	30	149,0	20	50	0,5	1,75
	32	M52 x 2	38	185,5	22	60	0,5	3,20
BSP-female head DIN EN ISO 228-1 	4	G 1/8	-	90,0	12	19	1,0	0,18
	6	G 1/4	-	90,0	12	19	1,0	0,18
	10	G 3/8	-	85,0	14	24	0,5	0,27
	12	G 1/2	-	104,0	15	30	0,5	0,46
	16	G 5/8	-	106,0	18	36	0,5	0,90
	20	G 3/4	-	120,0	18	41	0,5	1,00
	25	G 1	-	142,0	18	50	0,5	1,75
	32	G 1 1/4	-	151,5	20	60	0,5	2,90
	40	G 1 1/2	-	on request				
	50	G 2	-	on request				
NPT-female thread ANSI/ASME B1.20.1-1983 	4	1/8 - 27 NPT	-	90,0	6,9	19	1,0	0,18
	6	1/4 - 18 NPT	-	90,0	10,0	19	1,0	0,18
	10	3/8 - 18 NPT	-	85,0	10,3	24	0,5	0,27
	12	1/2 - 14 NPT	-	104,0	13,6	30	0,5	0,46
	20	3/4 - 14 NPT	-	120,0	14,1	41	0,5	1,00
	25	1 - 11 1/2 NPT	-	142,0	16,8	50	0,5	1,75
	32	1 1/4 - 11 1/2 NPT	-	151,5	17,3	60	0,5	2,85
	40	1 1/2 - 11 1/2 NPT	-	on request				
	50	2 - 11 1/2 NPT	-	on request				

Please check pressure rating of the pipe fittings!

Custom orders on request

All dimensions subject to change without notice

Also available with most other connection types

Dimensions in mm

Weight in kg

Pressure in bar

DN	Steel/POM-FKM	
	PN	Article-No.
4	400	233 033
6	400	233 034
8	400	233 036
10	400	233 037
12	400	233 038
16	400	233 040
20	400	233 041
25	400	233 042
32	400	233 044
40	400	233 045
4	400	233 031
6	400	233 054
8	400	233 032
10	400	233 055
12	400	233 056
16	400	233 035
20	400	233 057
25	400	233 058
32	400	233 053
4	400	233 039
6	400	233 059
10	400	233 060
12	400	233 061
16	400	233 043
20	400	233 062
25	400	233 063
32	400	233 046
40	400	233 047
50	400	233 048
4	400	233 049
6	400	233 064
10	400	233 065
12	400	233 066
20	400	233 067
25	400	233 068
32	400	233 050
40	400	233 051
50	400	233 052