

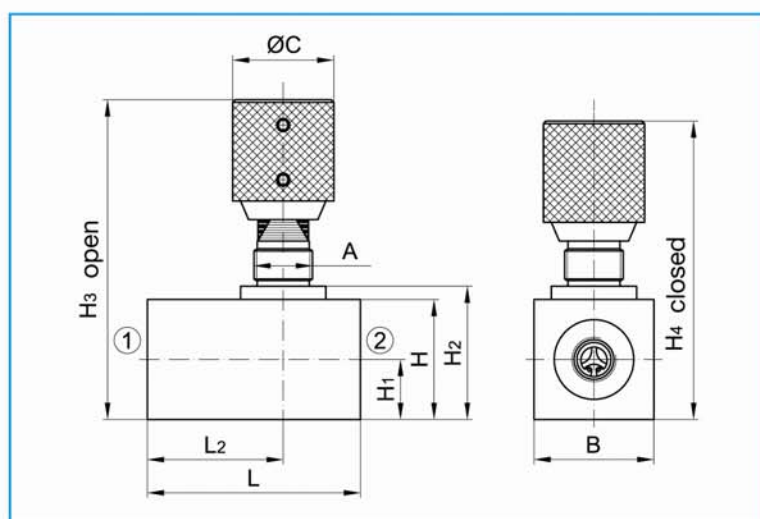




Flow control valves · DN 4 - DN 50



Body: Steel
 Spindle: Steel
 Rotary knob: Aluminium
 PN: 350 bar
 Opening pressure: 0,5 bar
 Custom orders on request
 All dimensions subject to change without notice
 Dimensions in mm
 Weight in kg

Type of connection	DN	Thread	D	L	L1	L2	A	B	ØC	H	H1	H2	H3	H4	Weig.	Art-No. (NBR)	Art-No. (FKM)
BSP-female thread DIN EN ISO 228-1 	4	G 1/8		45	10,0	26,0	M18x1,5	20	29	20	10,0	23	87,0	78,0	0,25	218 001	218 028
	6	G 1/4		55	12,0	33,5	M18x1,5	25	29	25	12,5	28	92,0	83,0	0,38	218 002	218 029
	10	G 3/8		65	14,0	41,0	M18x1,5	30	29	30	15,0	33	97,0	88,0	0,52	218 003	218 030
	12	G 1/2		73	15,0	48,0	M18x1,5	35	29	35	17,5	38	102,0	93,0	0,70	218 004	218 031
	20	G 3/4		88	16,0	57,0	M22x1,5	45	38	45	22,5	49	123,0	111,0	1,35	218 005	218 032
	25	G1		127	20,0	77,0	M36x1,5	50	50	50	25,0	56	172,5	154,5	2,68	218 006	218 033
	32	G1 1/4		143	20,0	93,0	M36x1,5	60	50	60	30,0	66	182,5	164,5	3,92	218 007	218 034
	40	G1 1/2		143	23,0	98,0	M36x1,5	70	50	70	35,0	76	192,5	174,5	4,84	218 008	218 035
	50	G2		165	24,5	111,0	M36x1,5	90	50	90	45,0	96	212,5	194,5	8,95	218 009	218 036
NPT-female thread ANSI/ ASME B1.20.1-1983 	4	1/8 - 27	NPT	45	6,9	26,0	M18x1,5	20	29	20	10,0	23	87,0	78,0	0,25	218 010	218 037
	6	1/4 - 18	NPT	55	10,0	33,5	M18x1,5	25	29	25	12,5	28	92,0	83,0	0,38	218 011	218 038
	10	3/8 - 18	NPT	65	10,3	41,0	M18x1,5	30	29	30	15,0	33	97,0	88,0	0,52	218 012	218 039
	12	1/2 - 14	NPT	73	13,6	48,0	M18x1,5	35	29	35	17,5	38	102,0	93,0	0,70	218 013	218 040
	20	3/4 - 14	NPT	88	14,1	57,0	M22x1,5	45	38	45	22,5	49	123,0	111,0	1,35	218 014	218 041
	25	1 - 11 1/2	NPT	127	16,8	77,0	M36x1,5	50	50	50	25,0	56	172,5	154,5	2,68	218 015	218 042
	32	1 1/4 - 11 1/2	NPT	143	17,3	93,0	M36x1,5	60	50	60	30,0	66	182,5	164,5	3,92	218 016	218 043
	40	1 1/2 - 11 1/2	NPT	143	17,3	98,0	M36x1,5	70	50	70	35,0	76	192,5	174,5	4,84	218 017	218 044
	50	2 - 11 1/2	NPT	165	17,7	111,0	M36x1,5	90	50	90	45,0	96	212,5	194,5	8,95	218 018	218 045
Female thread ISO 11926-1 	4	7/16 -20	UNF-2B	49	11,5	28,0	M18x1,5	20	29	20	10,0	23	87,0	78,0	0,25	218 020	218 047
	6	1/2 -20	UNF-2B	55	11,5	33,5	M18x1,5	25	29	25	12,5	28	92,0	83,0	0,38	218 055	218 057
	8	9/16 -18	UNF-2B	67	12,7	42,0	M18x1,5	30	29	30	15,0	33	97,0	88,0	0,52	218 021	218 048
	10	3/4 -16	UNF-2B	67	14,3	42,0	M18x1,5	30	29	30	15,0	33	97,0	88,0	0,52	218 022	218 049
	12	7/8 -14	UNF-2B	77	16,7	50,0	M18x1,5	35	29	35	17,5	38	102,0	93,0	0,70	218 056	218 058
	16	1 1/16 -12	UN -2B	94	19,0	60,0	M22x1,5	45	38	45	22,5	49	123,0	111,0	1,35	218 023	218 050
	20	1 5/16 -12	UN -2B	127	19,0	77,0	M36x1,5	50	50	50	25,0	56	172,5	154,5	2,68	218 024	218 051
	25	1 5/8 -12	UN -2B	143	19,0	93,0	M36x1,5	60	50	60	30,0	66	182,5	164,5	3,92	218 025	218 052
	32	1 7/8 -12	UN -2B	143	19,0	98,0	M36x1,5	70	50	70	35,0	76	192,5	174,5	4,84	218 026	218 053
	40	2 1/2 -12	UN -2B	165	19,0	111,0	M36x1,5	90	50	90	45,0	96	212,5	194,5	8,95	218 027	218 054