



2-way ball valves with threaded connector


Aluminium · DN 4 - DN 25

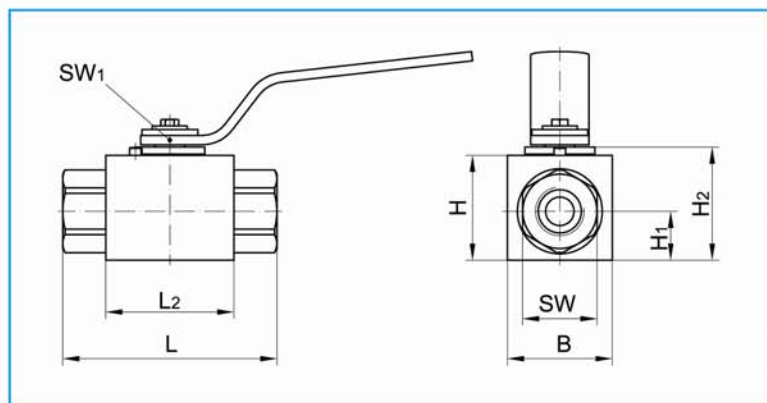


Type of connection	DN	Thread D	RA	L	L ₁	L ₂	B	H	H ₁	H ₂	SW	SW ₁	Handle Code	Weight
--------------------	----	----------	----	---	----------------	----------------	---	---	----------------	----------------	----	-----------------	-------------	--------




4	M12 x 1,5	6	78	10	46,4	30	30	13,7	33,5	22	7	26	0,20
6	M14 x 1,5	8	78	10	46,4	30	30	13,7	33,5	22	7	26	0,20
8	M16 x 1,5	10	87	11	53,0	45	45	23,0	49,5	30	8	27	0,49
10	M18 x 1,5	12	87	11	53,0	45	45	23,0	49,5	30	8	27	0,49
12	M22 x 1,5	15	93	12	57,0	50	50	26,0	54,5	32	10	28	0,56
20	M30 x 2	22	108	14	68,0	70	70	36,0	75,0	46	14	29	1,34
25	M36 x 2	28	114	14	73,0	80	80	43,0	85,0	50	14	29	1,59



4	M16 x 1,5	8	81	12	46,4	30	30	13,7	33,5	22	7	26	0,22
6	M18 x 1,5	10	81	12	46,4	30	30	13,7	33,5	22	7	26	0,22
8	M20 x 1,5	12	89	12	53,0	45	45	23,0	49,5	30	8	27	0,50
10	M22 x 1,5	14	93	14	53,0	45	45	23,0	49,5	30	8	27	0,50
12	M24 x 1,5	16	98	14	57,0	50	50	26,0	54,5	32	10	28	0,58
20	M36 x 2	25	116	18	68,0	70	70	36,0	75,0	46	14	29	1,42
25	M42 x 2	30	126	20	73,0	80	80	43,0	85,0	50	14	29	1,66



4	G 1/8	-	80	11	46,4	30	30	13,7	33,5	22	7	26	0,22
6	G 1/4	-	80	14	46,4	30	30	13,7	33,5	22	7	26	0,22
10	G 3/8	-	85	14	53,0	45	45	23,0	49,5	30	8	27	0,50
12	G 1/2	-	100	16	57,0	50	50	26,0	54,5	32	10	28	0,60
20	G 3/4	-	120	18	68,0	70	70	36,0	75,0	46	14	29	1,41
25	G 1	-	135	20	73,0	80	80	43,0	85,0	50	14	29	1,78



4	1/8 - 27	NPT	-	80	6,9	46,4	30	30	13,7	33,5	22	7	26	0,22
6	1/4 - 18	NPT	-	80	10,0	46,4	30	30	13,7	33,5	22	7	26	0,22
10	3/8 - 18	NPT	-	85	10,3	53,0	45	45	23,0	49,5	30	8	27	0,50
12	1/2 - 14	NPT	-	100	13,6	57,0	50	50	26,0	54,5	32	10	28	0,60
20	3/4 - 14	NPT	-	120	14,1	68,0	70	70	36,0	75,0	46	14	29	1,41
25	1 - 11 1/2	NPT	-	135	16,8	73,0	80	80	43,0	85,0	50	14	29	1,78

Handle included in delivery

For actuators and handles refer to "Attachments, accessories".

Stainless Steel (material No.1.4571 - or other stainless steels)

Custom orders on request

Also available with most other connection types

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Overall length: Female thread connector

DIN 3202-4-M6/M9

Please check pressure rating of the pipe fittings!

Body:	Aluminium
Ball:	Stainless steel
Stem:	Stainless steel
Ball seats:	POM
Stem seals:	NBR

DN	PN	Article-No.
4	400	105 152
6	400	105 153
8	400	105 170
10	400	105 154
12	400	105 155
20	400	105 156
25	400	105 157
4	400	105 158
6	400	105 159
8	400	105 171
10	400	105 160
12	400	105 161
20	400	105 162
25	400	105 163
4	400	105 151
6	400	105 141
10	400	105 142
12	400	105 143
20	400	105 144
25	400	105 145
4	400	105 164
6	400	105 165
10	400	105 166
12	400	105 167
20	400	105 168
25	400	105 169