
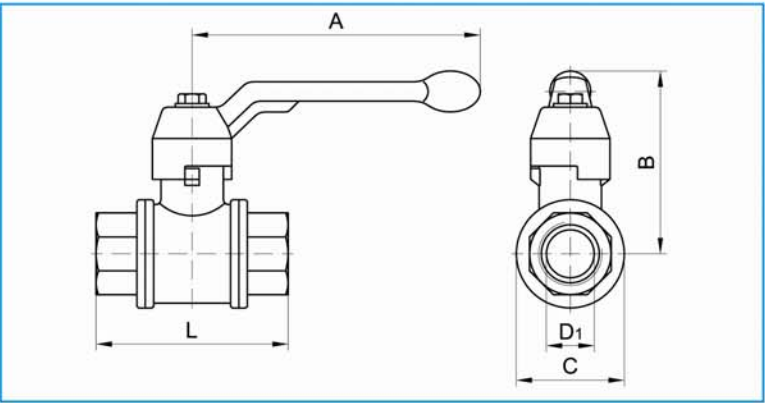


2-way ball valves with threaded connector

Brass • DN 4 - DN 50



Type of connection	DN	Thread D	D1	L	L1	A	B	C	Weight
	4	Rp 1/8	8	50	10	75	52	23	0,16
	6	Rp 1/4	8	50	13	75	52	23	0,15
	10	Rp 3/8	10	60	13	100	61	29	0,25
	12	Rp 1/2	15	75	16	100	64	36	0,38
	20	Rp 3/4	20	80	17	120	76	45	0,63
	25	Rp 1	25	90	19	120	80	54	0,90
	32	Rp 1 1/4	32	110	22	150	97	65	1,58
	40	Rp 1 1/2	40	120	22	150	104	79	2,38
	50	Rp 2	50	140	27	175	118	96	3,74

Handle included in delivery
 Overall length DIN 3202-4-M3
 Approved by DVGW for use up to PN 4
 All dimensions subject to change without notice
 Dimensions in mm
 Weight in kg
 Pressure in bar

Body:	Brass
Ball:	Brass
Stem:	Brass
Ball seats:	PTFE
Stem seals:	PTFE

DN	PN	Article-No.
4	64	101 531
6	64	101 532
10	64	101 533
12	50	101 534
20	50	101 535
25	50	101 536
32	40	101 537
40	40	101 538
50	32	101 539