
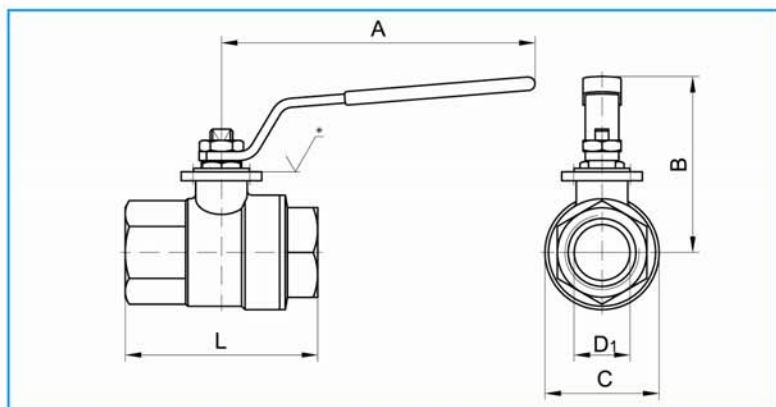


2-way ball valves with threaded connector

Stainless Steel · DN 10 - DN 50



Type of connection	DN	Thread	D1	L	L1	A	B	C	* Porting pattern DIN EN ISO 5211	Weight
 BSP-female thread DIN EN 10226-1	10	Rp 3/8	10	50	11,4	110	52	29,0	F 03	0,23
	12	Rp 1/2	15	60	15,0	110	55	34,5	F 03	0,31
	20	Rp 3/4	20	70	16,3	140	66	42,5	F 03	0,51
	25	Rp 1	25	85	19,1	140	70	50,5	F 03	0,76
	32	Rp 1 1/4	32	95	21,4	180	85	63,0	F 04	1,27
	40	Rp 1 1/2	40	105	21,4	180	91	75,5	F 04	1,81
	50	Rp 2	50	125	25,7	230	105	91,0	F 05	3,16

Handle included in delivery

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Body:	Stainless steel
Ball:	Stainless steel
Stem:	Stainless steel
Ball seats:	PTFE
Stem seals:	NBR

DN

PN

Article-No.

10	160	101 523
12	160	101 524
20	100	101 525
25	100	101 526
32	64	101 527
40	64	101 528
50	40	101 529