


2-way ball valves with threaded connector

Stainless Steel • DN 6 - DN 25

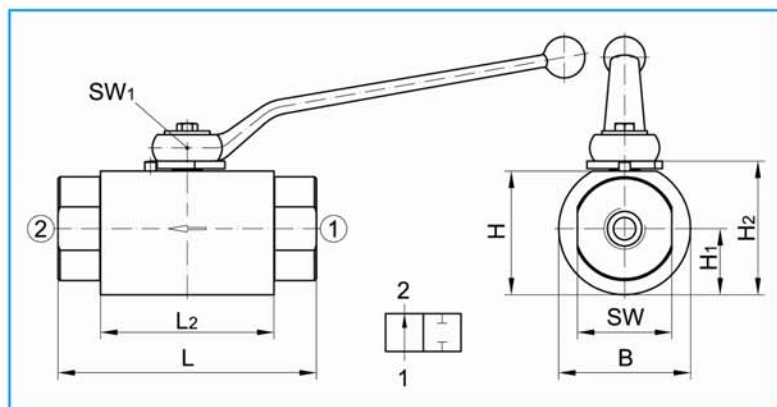

DN 6 - DN 12: can be actuated at differential pressure of up to 500 bar

DN 20 + DN 25: can be actuated at differential pressure of up to 400 bar


Unidirectional installation!

Note: Use only with fluid media!


*) Deviating from the standard:
longer connection thread

Type of connection

DN Thread D RA L L₁ L₂ B H H₁ H₂ SW SW₁ Handle-Code Weight

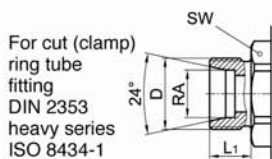

6	M18 x 1,5	10	144	18*	92	70	65,5	35	70,0	50	17	21	2,7
8	M20 x 1,5	12	144	18*	92	70	65,5	35	70,0	50	17	21	2,9
10	M22 x 1,5	14	150	21*	92	70	65,5	35	70,0	50	17	21	3,0
12	M24 x 1,5	16	150	21*	92	70	65,5	35	70,0	50	17	21	3,4
20	M36 x 2	25	172	23*	110	80	77,0	40	81,5	55	17	21	4,8
25	M42 x 2	30	202	25*	128	100	98,0	50	102,5	70	17	21	9,2

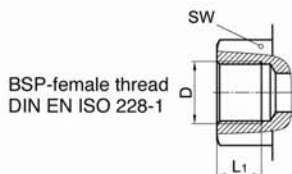

6	G 1/4	-	108,0	12	92	70	65,5	35	70,0	50	17	21	3,4
10	G 3/8	-	120,0	14	92	70	65,5	35	70,0	50	17	21	3,8
12	G 1/2	-	137,0	16	92	70	65,5	35	70,0	50	17	21	4,1
20	G 3/4	-	146,5	19	110	80	77,0	40	81,5	55	17	21	4,9
25	G 1	-	172,0	21	128	100	98,0	50	102,5	70	17	21	9,6

Handle included in delivery

Please check pressure rating of the pipe fittings!

For actuators and handles refer to "Attachments, accessories".

Custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Body:	Stainless steel
Ball:	Stainless steel
Stem:	Stainless steel
Ball seats:	PEEK
Stem seals:	NBR

DN

PN

Article-No.

6	1500	100 900
8	1500	100 901
10	1500	100 902
12	1500	100 903
20	1400	100 904
25	1000	100 905

6	1500	100 906
10	1500	100 907
12	1500	100 908
20	1400	100 909
25	1000	100 910