
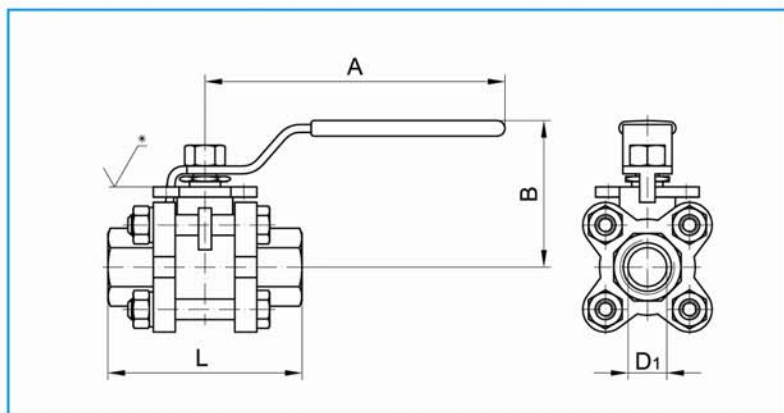




2-way ball valves with threaded connector

Stainless steel · with removable centre · DN 6 - DN 50



Type of connection	DN	Thread D	D1	L	L1	A	B	* Porting pattern	Weight DIN EN ISO 5211
 BSP-female thread DIN EN ISO 228-1	6	G 1/4	11,6	50	12,0	105	51	F04	0,45
	10	G 3/8	12,7	60	12,0	105	51	F04	0,45
	12	G 1/2	15,0	75	15,0	105	61	F04	0,65
	20	G 3/4	20,0	80	19,0	125	66	F04	0,75
	25	G 1	25,0	90	22,0	152	78	F04	1,15
	32	G 1 1/4	32,0	110	21,4	152	82	F04	1,75
	40	G 1 1/2	38,0	120	21,4	191	95	F05	2,40
 BSP-female thread DIN EN 10266-1	6	Rp 1/4	11,6	50	12,0	105	51	F04	0,45
	10	Rp 3/8	12,7	60	12,0	105	51	F04	0,45
	12	Rp 1/2	15,0	75	15,0	105	61	F04	0,65
	20	Rp 3/4	20,0	80	19,0	125	66	F04	0,75
	25	Rp 1	25,0	90	22,0	152	78	F04	1,15
	32	Rp 1 1/4	32,0	110	21,4	152	82	F04	1,75
	40	Rp 1 1/2	38,0	120	21,4	191	95	F05	2,40
 NPT-female thread ANSI/ASME B1.20.1-1983	6	1/4 - 18 NPT	11,6	50	10,0	105	51	F04	0,45
	10	3/8 - 18 NPT	12,7	60	10,3	105	51	F04	0,45
	12	1/2 - 14 NPT	15,0	75	13,6	105	61	F04	0,65
	20	3/4 - 14 NPT	20,0	80	14,1	125	66	F04	0,75
	25	1 - 11 1/2 NPT	25,0	90	16,8	152	78	F04	1,15
	32	1 1/4 - 11 1/2 NPT	32,0	110	17,3	152	82	F04	1,75
	40	1 1/2 - 11 1/2 NPT	38,0	120	17,3	191	95	F05	2,40
	50	2 - 11 1/2 NPT	49,0	140	17,7	191	104	F05	3,60

Handle included in delivery

Overall length DIN 3202-4-M3

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Body: Stainless steel

Ball: Stainless steel

Stem: Stainless steel

Ball seats: PTFE

Stem seals: PTFE

DN

PN

Article-No.

6	63	100 853
10	63	100 854
12	63	100 855
20	63	100 856
25	63	100 857
32	63	100 858
40	63	100 859
50	40	100 860

6	63	100 890
10	63	100 891
12	63	100 892
20	63	100 893
25	63	100 894
32	63	100 895
40	63	100 896
50	40	100 897

6	63	100 913
10	63	100 914
12	63	100 915
20	63	100 916
25	63	100 917
32	63	100 918
40	63	100 919
50	40	100 920