



2-way ball valves with threaded connector


Steel · DN 4 - DN 25

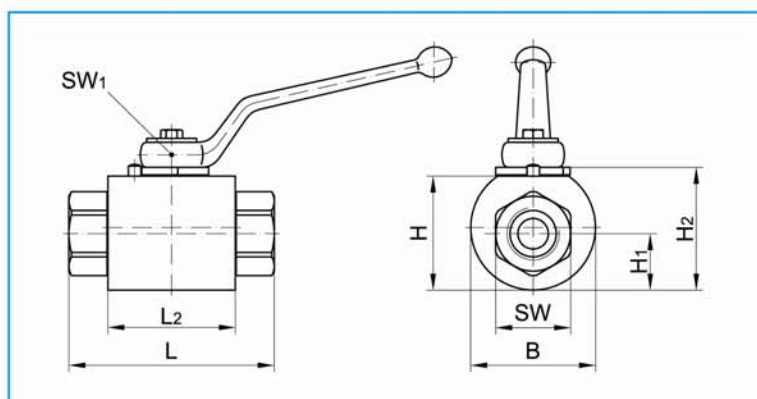


Type of connection	DN	Thread D	RA	L	L ₁	L ₂	B	H	H ₁	H ₂	SW	SW ₁	Handle Code	Weight
--------------------	----	-------------	----	---	----------------	----------------	---	---	----------------	----------------	----	-----------------	----------------	--------



4	M16 x 1,5	8	114	12	67	65	62,5	30	66	41	9	18	1,84
6	M18 x 1,5	10	114	12	67	65	62,5	30	66	41	9	18	1,86
8	M20 x 1,5	12	114	12	67	65	62,5	30	66	41	9	18	1,89
10	M22 x 1,5	14	118	14	67	65	62,5	30	66	41	9	18	1,96
12	M24 x 1,5	16	118	14	67	65	62,5	30	66	41	9	18	1,98
20	M36 x 2	25	156	18	90	108	102,0	51	106	70	14	20	6,60
25	M42 x 2	30	160	20	90	108	102,0	51	106	70	14	20	6,60



4	G 1/8	-	90	11	67	65	62,5	30	66	41	9	18	1,82
6	G 1/4	-	90	15	67	65	62,5	30	66	41	9	18	1,82
10	G 3/8	-	90	15	67	65	62,5	30	66	41	9	18	1,84
12	G 1/2	-	90	17	67	65	62,5	30	66	41	9	18	1,90
20	G 3/4	-	120	19	90	108	102,0	51	106	70	14	20	6,50
25	G 1	-	120	21	90	108	102,0	51	106	70	14	20	6,50



4	1/8 - 27	NPT	-	90	6,9	67	65	62,5	30	66	41	9	18	1,82
6	1/4 - 18	NPT	-	90	10,0	67	65	62,5	30	66	41	9	18	1,82
10	3/8 - 18	NPT	-	90	10,3	67	65	62,5	30	66	41	9	18	1,84
12	1/2 - 14	NPT	-	90	13,6	67	65	62,5	30	66	41	9	18	1,90
20	3/4 - 14	NPT	-	120	14,1	90	108	102,0	51	106	70	14	20	6,50
25	1 - 11 1/2	NPT	-	120	16,8	90	108	102,0	51	106	70	14	20	6,50

Handle included in delivery

Please check pressure rating of the pipe fittings!

For actuators and handles refer to "Attachments, accessories".

Custom orders on request

Also available with most other connection types

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Body:	Steel
Ball:	Steel, hard chrome plated
Stem:	Steel
Ball seats:	PEEK
Stem seals:	NBR

DN	PN	Article-No.
4	800	101 338
6	800	101 339
8	800	101 340
10	800	101 341
12	800	101 342
20	800	101 343
25	800	101 344
4	800	101 345
6	800	101 346
10	800	101 347
12	800	101 348
20	800	101 349
25	800	101 350
4	800	101 351
6	800	101 352
10	800	101 353
12	800	101 354
20	800	101 355
25	800	101 356