



2-way ball valves with threaded connector

Steel · with spring return and integrated check valve

Unidirectional installation!

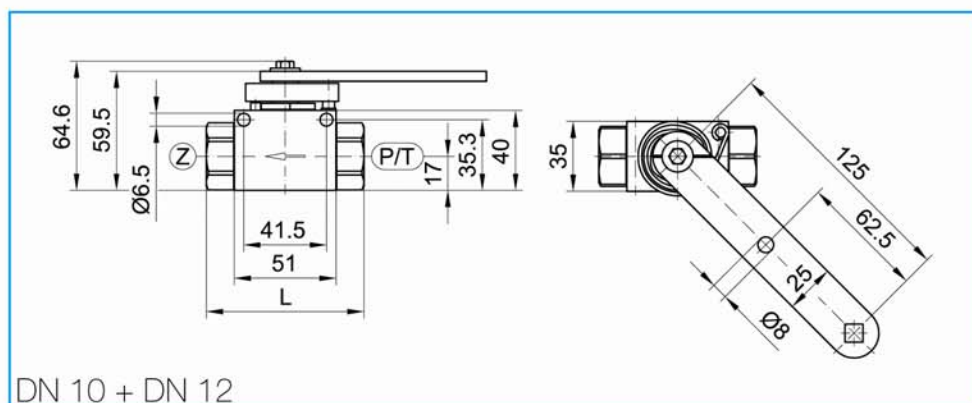


Type of connection	DN	Thread D	RA	L	L _i	SW	Weight
--------------------	----	-------------	----	---	----------------	----	--------




For cut (clamp)
ring tube
fitting
DIN 2353
light series
ISO 8434-1

10	M 18 x 1,5	12	81	11	30	0,82
12	M 22 x 1,5	15	83	12	30	0,82




For cut (clamp)
ring tube
fitting
DIN 2353
heavy series
ISO 8434-1

10	M 22 x 1,5	14	87	14	30	0,85
12	M 24 x 1,5	16	87	14	30	0,85



BSP-female thread
DIN EN ISO 228-1

10	G 3/8	-	79	14	30	0,82
12	G 1/2	-	82	15	30	0,82

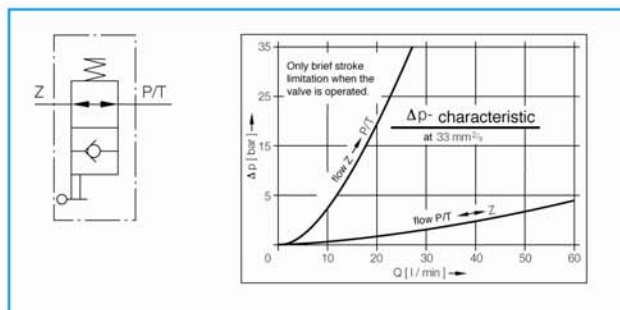

Please check pressure rating of the pipe fittings!

Custom orders on request

All dimensions subject to change without notice

Handle included in delivery

Also available without check valve

Dimensions in mm

Weight in kg

Pressure in bar

Body:	Steel
Ball:	Steel, hard chrome plated
Stem:	Steel
Ball seats:	POM
Stem seals:	NBR

DN	PN	Article-No.
10	500	300 004
12	500	300 005
10	500	300 008
12	500	300 009
10	500	300 006
12	500	300 007