


2-way ball valves with threaded connector

Steel or Stainless Steel · as combination · DN 4 - DN 50

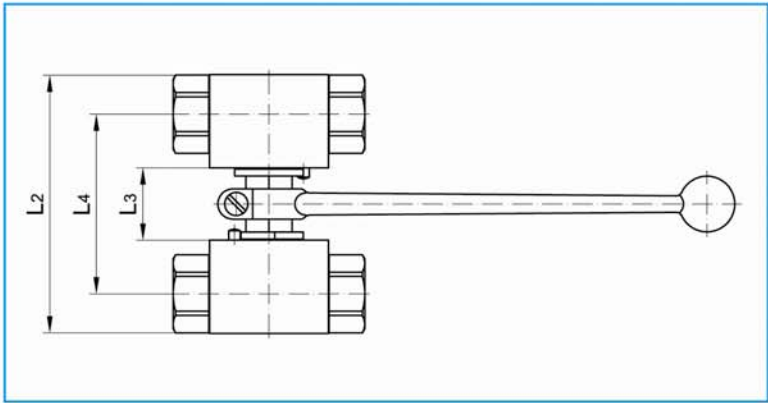

Type of connection	DN	Steel			Stainless Steel	
		L2	L3	L4	L2	L4
ALL	4	67	17	47	77	49,6
	6	67	17	47	77	49,6
	8	94	24	65	104	68,0
	10	94	24	65	104	68,0
	12	111	31	77	121	79,0
	16*	126	36	86	121	79,0
	20	150	40	102	170	108,0
	25	160	40	108	190	114,0
	32	203	43	130	-	-
	40	223	43	138	-	-
	50	251	43	152	-	-

Mounting sets are identical in design for multi-way ball valves with floating ball.

*) Stainless Steel: DN 16/12: L3 = 31; (Article-No. DN 12)

For dimensions and article-numbers for ball valve bodies refer to the respective chapter.

Stainless Steel DN 32 - DN 50 on request


Custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Also available completely assembled

Mounting sets DN	Article-No. (Steel)	Article-No. (Stainless steel)
4	100 780	100 849
6	100 780	100 849
8	100 781	100 850
10	100 781	100 850
12	100 782	100 851
16	100 783	100 851
20	100 784	100 852
25	100 784	100 852
32	100 785	-
40	100 785	-
50	100 785	-

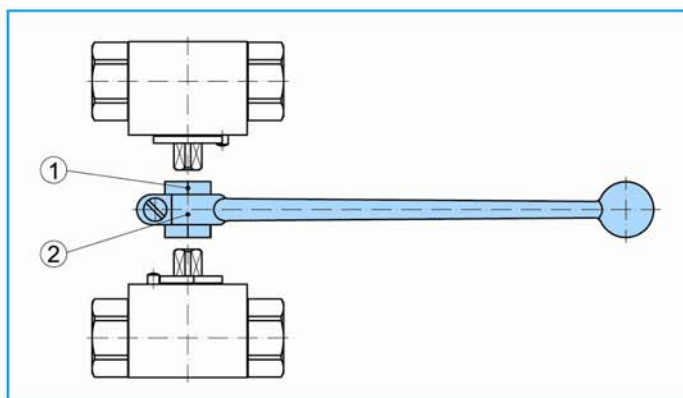

Combination consisting of:
two ball valves
(without handle)
and one mounting set

Mounting set consisting of
① Square coupling (1 pc.)
② Handle (1 pc.)