



2-way ball valves with threaded connector


Stainless Steel · DN 32 - DN 50

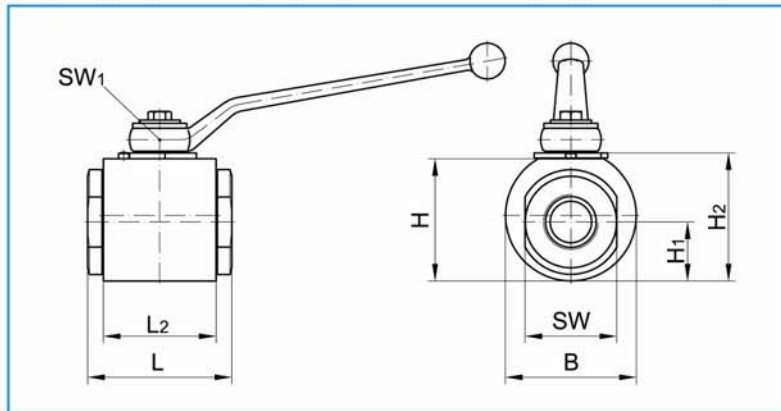


Type of connection	DN	Thread D	RA	L	L1	L2	B	H	H1	H2	SW	SW1	Handle- Code	Weight
--------------------	----	-------------	----	---	----	----	---	---	----	----	----	-----	-----------------	--------




32	M45 x 2	35	145	16	86	100	93,2	45,0	99,0	70	19	23	6,3
40	M52 x 2	42	150	16	92	110	104,4	52,2	110,0	80	19	23	7,8



32	M52 x 2	38	145	22	86	100	93,2	45,0	99,0	70	19	23	6,1
----	---------	----	-----	----	----	-----	------	------	------	----	----	----	-----



32	G 1 1/4	-	110	24,0	86	100	93,2	45,0	99,0	70	19	23	6,1
40	G 1 1/2	-	120	26,0	92	110	104,4	52,2	110,0	80	19	23	6,9
50	G 2	-	140	27,5	97	125	119,4	59,7	125,0	95	19	23	10,3



32	1 1/4 - 1 1/2 NPT	-	110	17,3	86	100	93,2	45,0	99,0	70	19	23	6,1
40	1 1/2 - 1 1/2 NPT	-	120	17,3	92	110	104,4	52,2	110,0	80	19	23	6,9
50	2 - 1 1/2 NPT	-	140	17,7	97	125	119,4	59,7	125,0	95	19	23	10,3

Handle included in delivery

Please check pressure rating of the pipe fittings!

For actuators and handles refer to "Attachments, accessories".

Stainless Steel (material no.1.4571 - or other stainless steels)

Custom orders on request

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Overall length: Pipe fitting connector

Overall length: Female thread connector

DIN 3202-5-V1/V2

DIN 3202-4-M3

Body:	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Ball:	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Stem:	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Ball seats:	POM	POM	PTFE	PTFE
Stem seals:	NBR	FKM	FKM	FFKM

DN	PN	Article-No.	PN	Article-No.	PN	Article-No.	PN	Article-No.
32	400	109 051	400	109 069	100	109 060	100	109 114
40	400	109 052	400	109 070	100	109 061	100	109 115
32	400	109 053	400	109 071	100	109 062	100	109 116
32	400	109 054	400	109 072	100	109 063	100	109 117
40	400	109 055	400	109 073	100	109 064	100	109 118
50	400	109 056	400	109 074	100	109 065	100	109 119
32	400	109 057	400	109 075	100	109 066	100	109 120
40	400	109 058	400	109 076	100	109 067	100	109 121
50	400	109 059	400	109 077	100	109 068	100	109 122