


2-way ball valves with threaded connector


Steel · DN 32 - DN 50

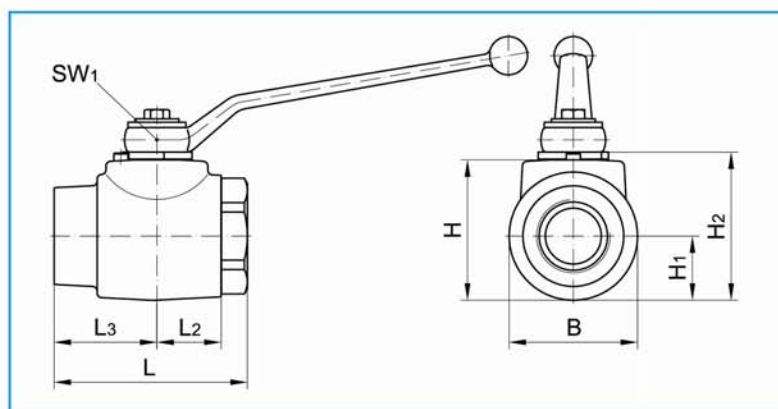

Type of connection


DN Thread RA L L₁ L₂ L₃ B H H₁ H₂ SW SW₁ Handle Weight Code

For cut
(clamp) ring
tube fittings
DIN 2353
light series
ISO 8434-1




32	M45 x 2	35	121	16	36,5	58,5	73	80	36,5	84,5	60	17	22	2,59
40	M52 x 2	42	118	16	40,0	52,5	85	90	42,5	94,5	75	17	22	3,24

For cut (clamp)
ring tube
fitting
DIN 2353
heavy series
ISO 8434-1




32	M52 x 2	38	127	22	36,5	58,2	73	80	36,5	84,5	60	17	22	2,73
----	---------	----	-----	----	------	------	----	----	------	------	----	----	----	------

BSP-female
thread
DIN EN ISO 228-1



32	G 1 1/4	-	110	24,0	36,5	58,5	73	80	36,5	84,5	60	17	22	3,07
40	G 1 1/2	-	114	26,0	40,0	57,0	85	90	42,5	94,5	75	17	22	3,96
50	G 2	-	129	27,5	48,0	65,0	99	104	49,5	108,5	85	17	22	5,02

NPT-female thread
ANSI/ASME
B1.20.1-1983



32	1 1/4 - 1 1/2 NPT	-	110	17,3	36,5	58,5	73	80	36,5	84,5	60	17	22	3,46
40	1 1/2 - 1 1/2 NPT	-	114	17,3	40,0	57,0	85	90	42,5	94,5	75	17	22	3,96
50	2 - 1 1/2 NPT	-	129	17,7	48,0	65,0	99	104	49,5	108,5	85	17	22	5,28

Handle included in delivery

Please check pressure rating of the pipe fittings!

For actuators and handles refer to "Attachments, accessories".

Custom orders on request

Also available with most other connection types

All dimensions subject to change without notice

Dimensions in mm

Weight in kg

Pressure in bar

Body:	Steel	Steel	Steel
Ball:	Steel, hard chrome plated	Steel, hard chrome plated	Steel, hard chrome plated
Stem:	Steel	Steel	Steel
Ball seats:	POM	POM	PTFE
Stem seals:	NBR	FKM	FKM

DN	PN	Article-No.	PN	Article-No.	PN	Article-No.
32	400	100 251	400	100 301	100	100 351
40	400	100 252	400	100 302	100	100 352
32	400	100 253	400	100 303	100	100 353
32	400	100 254	400	100 304	100	100 354
40	400	100 255	400	100 305	100	100 355
50	400	100 256	400	100 306	100	100 356
32	400	100 257	400	100 307	100	100 357
40	400	100 258	400	100 308	100	100 358
50	400	100 259	400	100 309	100	100 359